

PC-3WR

CEILING SPEAKER

The PC-3WR is a completely-sealed, flush-mounted ceiling speaker employing a high power handling, splash-proof, small full-range speaker. It can be quickly installed by means of a spring catch system, reducing labor in construction work. Its ideal applications include washrooms, locker rooms of the pool, and other humid locations.



Article number:PC-3WR


Specifications

| | |
|------------------------------|--|
| Sensitivity (1#V, 1#m) | 88 dB |
| Frequency response | 180 Hz - 20 kHz |
| Rated input (high impedance) | 3 W |
| Tappings | 3 / 1 W (100 V) |
| Finish | ABS resin, traffic white (RAL 9016 or equivalent), |
| Operating temperature | -10 °C to +50 °C |

PC-3WR

CEILING SPEAKER

Appearance

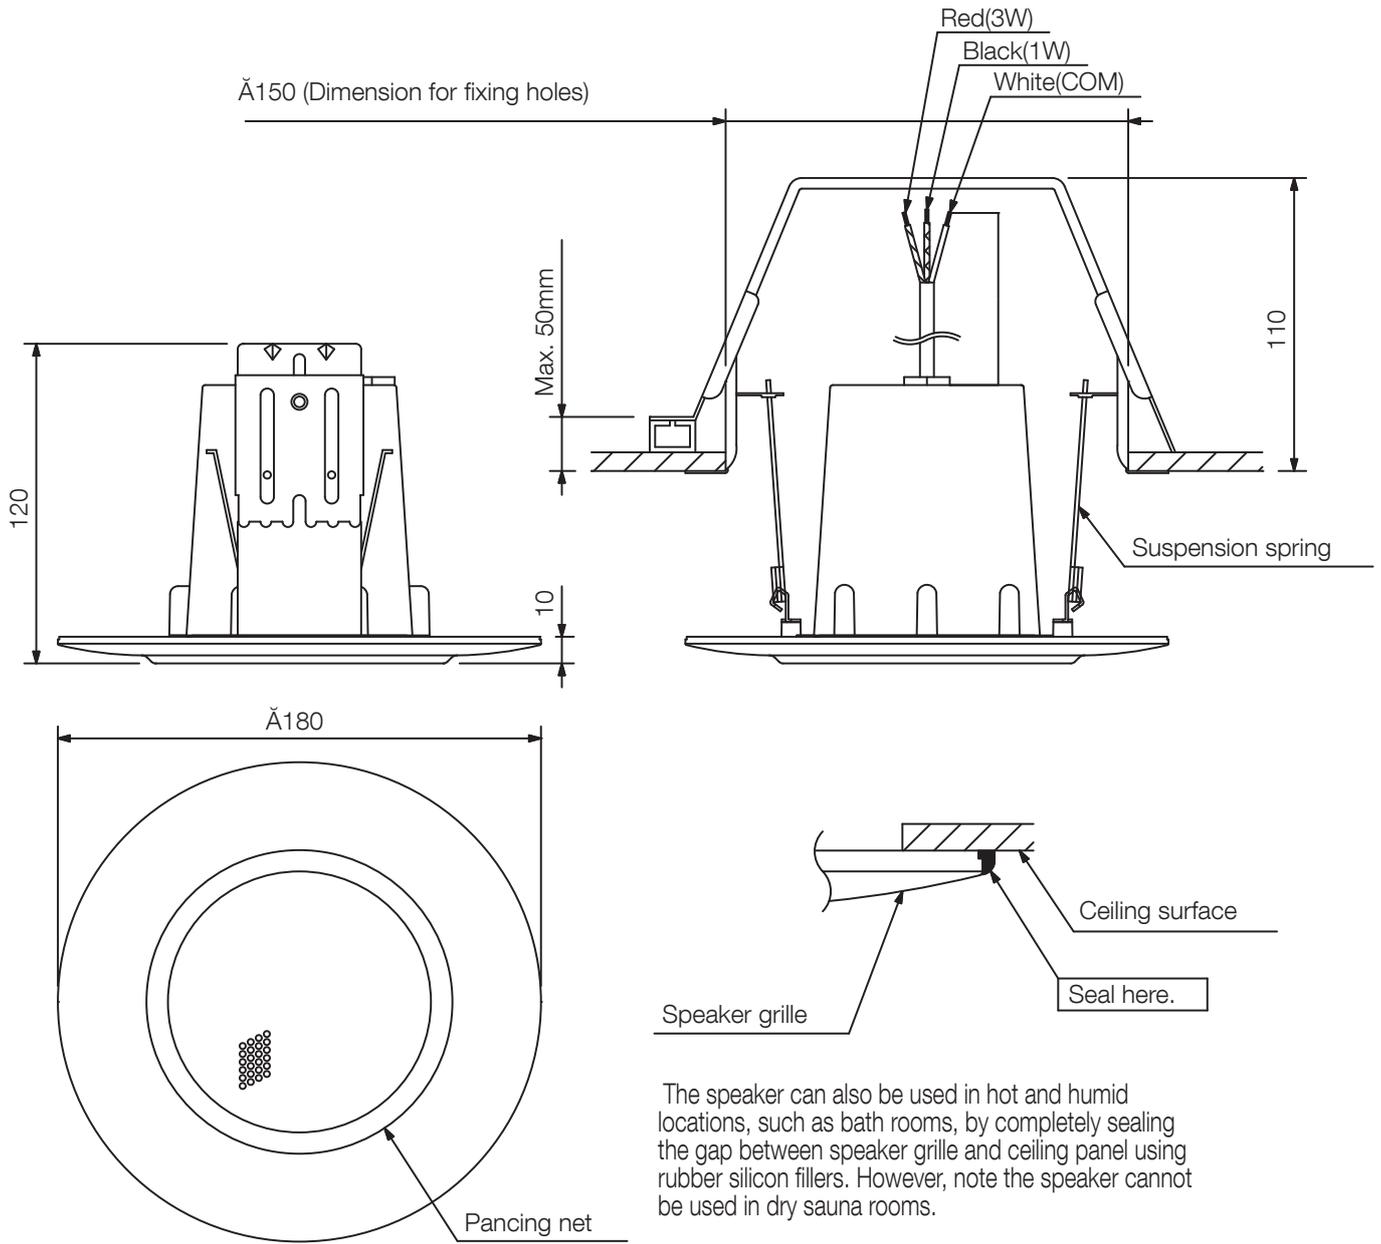

The speaker can also be used in hot and humid locations, such as bath rooms, by completely sealing the gap between speaker grille and ceiling panel using rubber silicon fillers. However, note the speaker cannot be used in dry sauna rooms.

UNIT:mm SCALE:1/3