

PC-5CL

CEILING SPEAKER

Full-range 8 cm, 5 W speaker with sealed rear chamber, and high-molecular substance speaker vibration section to prevent floating dust particles from contaminating medical, chemical, or IC/photo film production.



Article number:PC-5CL
Alternative products: PC-3CL


Specifications

Sensitivity (1#V, 1#m)	87 dB
Frequency response	150 Hz - 20 kHz
Rated input (high impedance)	5 W (100 V), 3 W (70 V)
Speaker component	8 cm cone-type
Finish	Alloy-coated ABS resin, silver metallic, Enclosure: ABS resin, punching net: stainless steel, ring: alloy-coated ABS, silver look
Operating temperature	-20 °C to +55 °C

PC-5CL

CEILING SPEAKER

Appearance

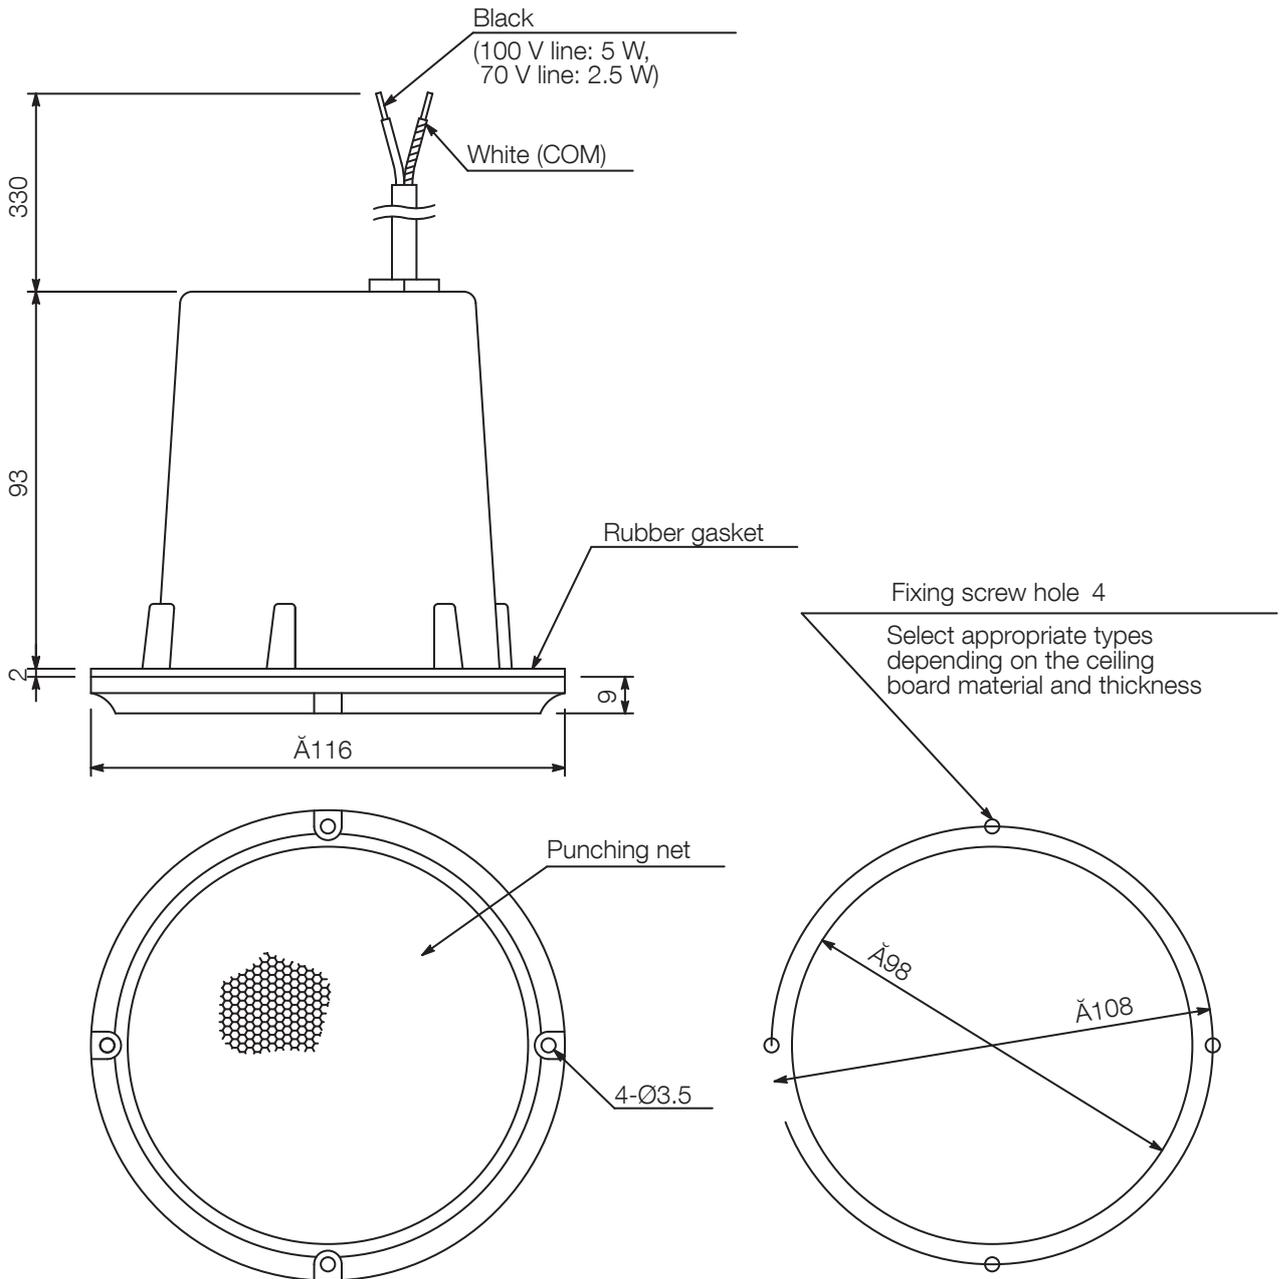

UNIT:mm

SCALE:1/2

Dimension diagram for fixing holes