

The PJ-64 is a projection speaker designed for ceiling and wall installations. Considered in architectural design, it can blend in with lighting equipment. The supplied swivel bracket allows for flexible speaker angle adjustment. The PJ-64 is driven on high-impedance (100 V and 70 V) line. The input power (impedance) can be easily changed at the upper side of the speaker. The speaker is easy to repaint so as to meet a wide range of design needs.




Article number: PJ-64
Alternative products: PJ-304

Specifications

Sensitivity (1#V, 1#n)	90 dB 500 - 5,000 Hz, pink noise
Frequency response	100 Hz - 18 kHz (peak -20 dB)
Connection	2-core cable cord 60 cm with diameter of 6 mm
Rated input (high impedance)	6 W (100 V), 3 W (70 V)
Tappings	100 V : 1.7 kΩ (6 W) / 3.3 kΩ (3 W) / 10 kΩ (1 W) 70 V : 830 Ω (6 W) / 1.7 kΩ (3 W) / 3.3 kΩ (1.5 W) / 10 kΩ (0.5 W)
Speaker component	12 cm cone-type
Finish	HIPS resin, off-white (RAL 9010 or equivalent), Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent color), paint

Appearance

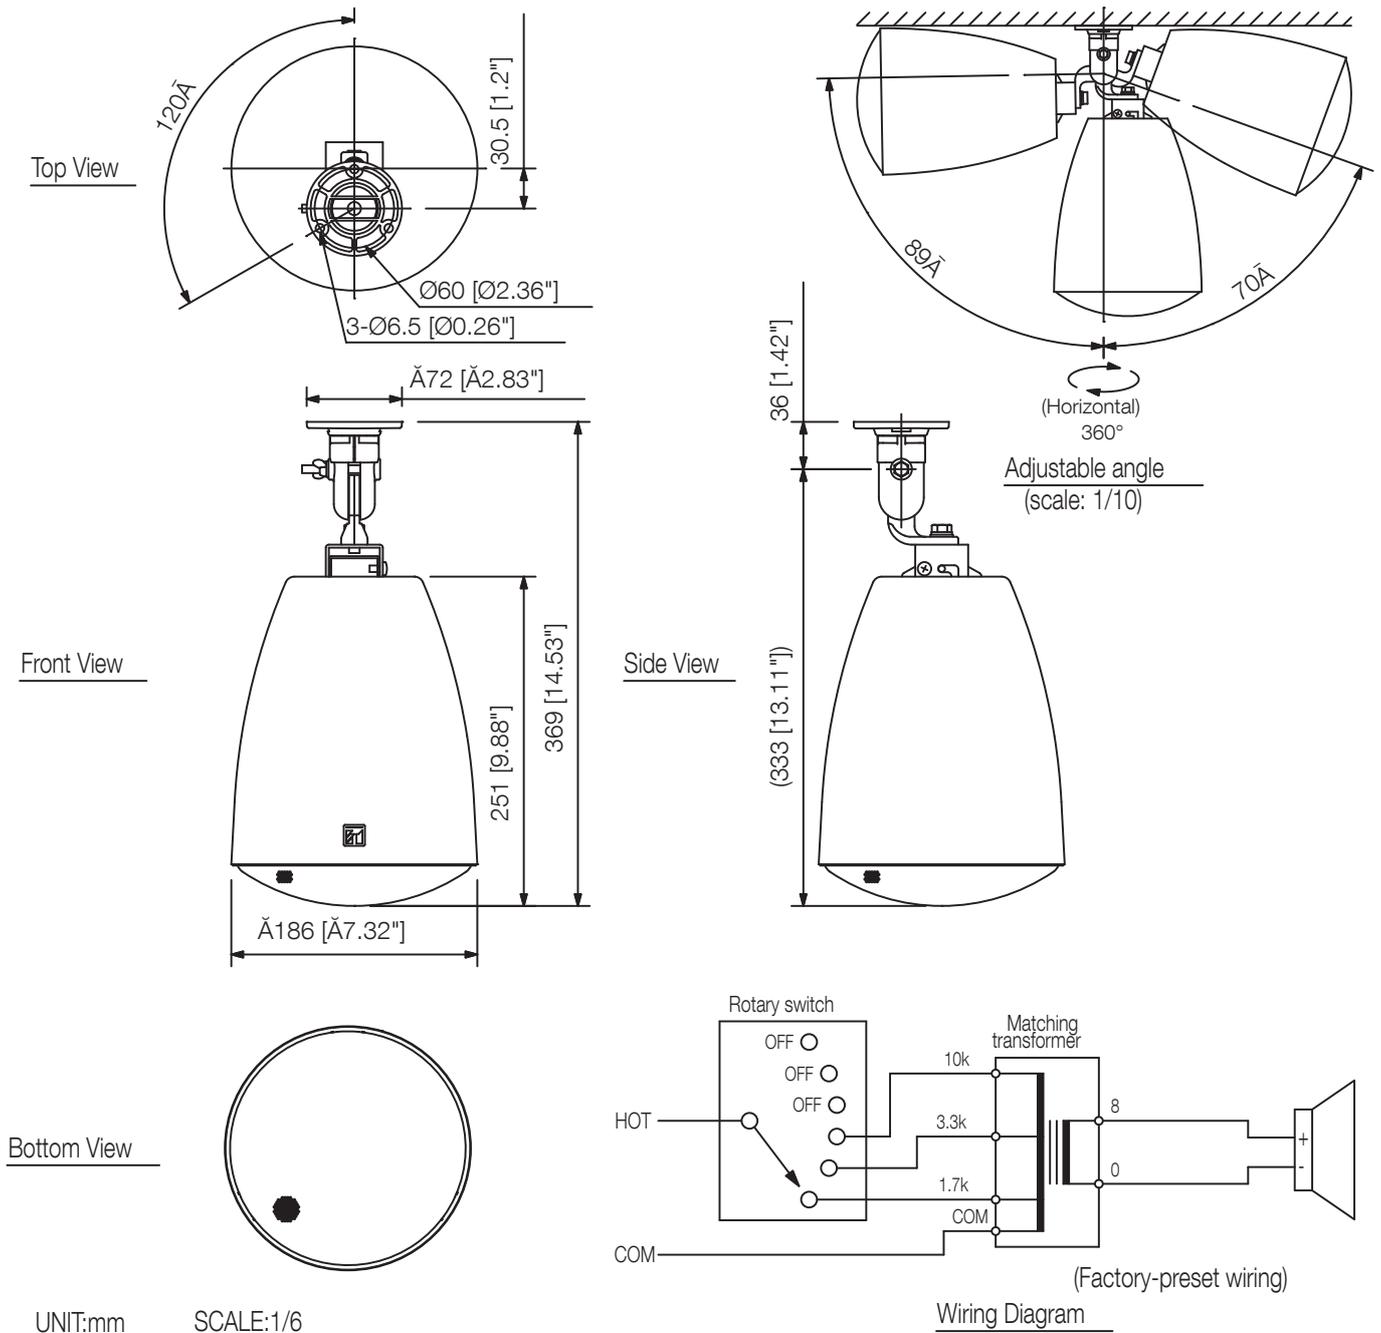

UNIT:mm

SCALE:1/6