

The SC-610 is a compact, highly intelligible speaker suited to public address announcement applications. Its external speaker component finished with powder coating, and stainless steel bracket and screws ensure the unit's weatherproof capability.

---




Article number: SC-610 EU  
Alternative products: SC-615, SC-630

---

### Specifications

Sensitivity (1#W, 1#m)	110 dB
Frequency response	315 Hz - 12.5 kHz
Connection	Cable with two wires
Rated input (high impedance)	10 W
Rated impedance	8 Ω
Finish	Aluminium, powder coating, off-white (RAL 9010 or equivalent),
Operating temperature	-20 °C to +55 °C (must be free from dew condensation)

Appearance

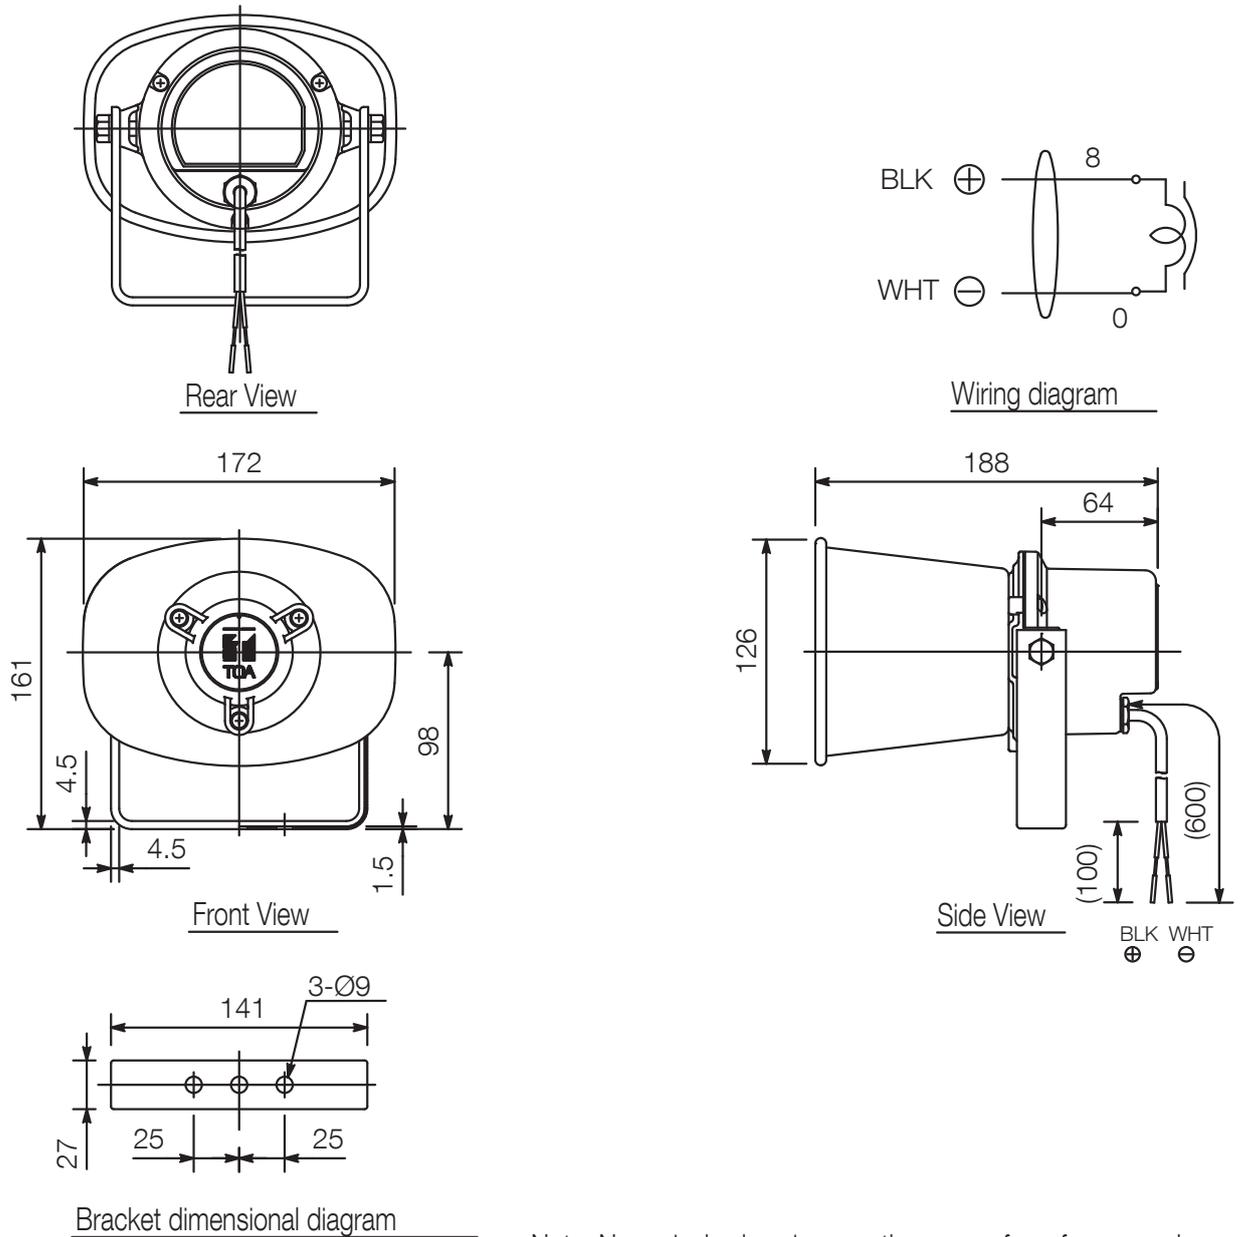

UNIT:mm

SCALE:1/5

Note: Numerical values in parentheses are for reference only.