

The TU-631 is a highly intelligible driver unit suited to public address announcement applications. Use the driver unit in combination with a suitable horn (optional). Its powder-coated finish and stainless steel screws ensure the unit's weatherproof capability.




Article number: TU-631

Specifications

Sensitivity (1#V, 1#m)	110 dB (with TH-650, TH-660)
Frequency response	150 Hz - 6 kHz
Rated input (low impedance)	30 W
Rated impedance	16 Ω
Finish	Aluminium, powder coating, grey, Rear cover: ABS resin, grey
Operating temperature	-20°C to +60°C (-4°F to 140°F)

Appearance

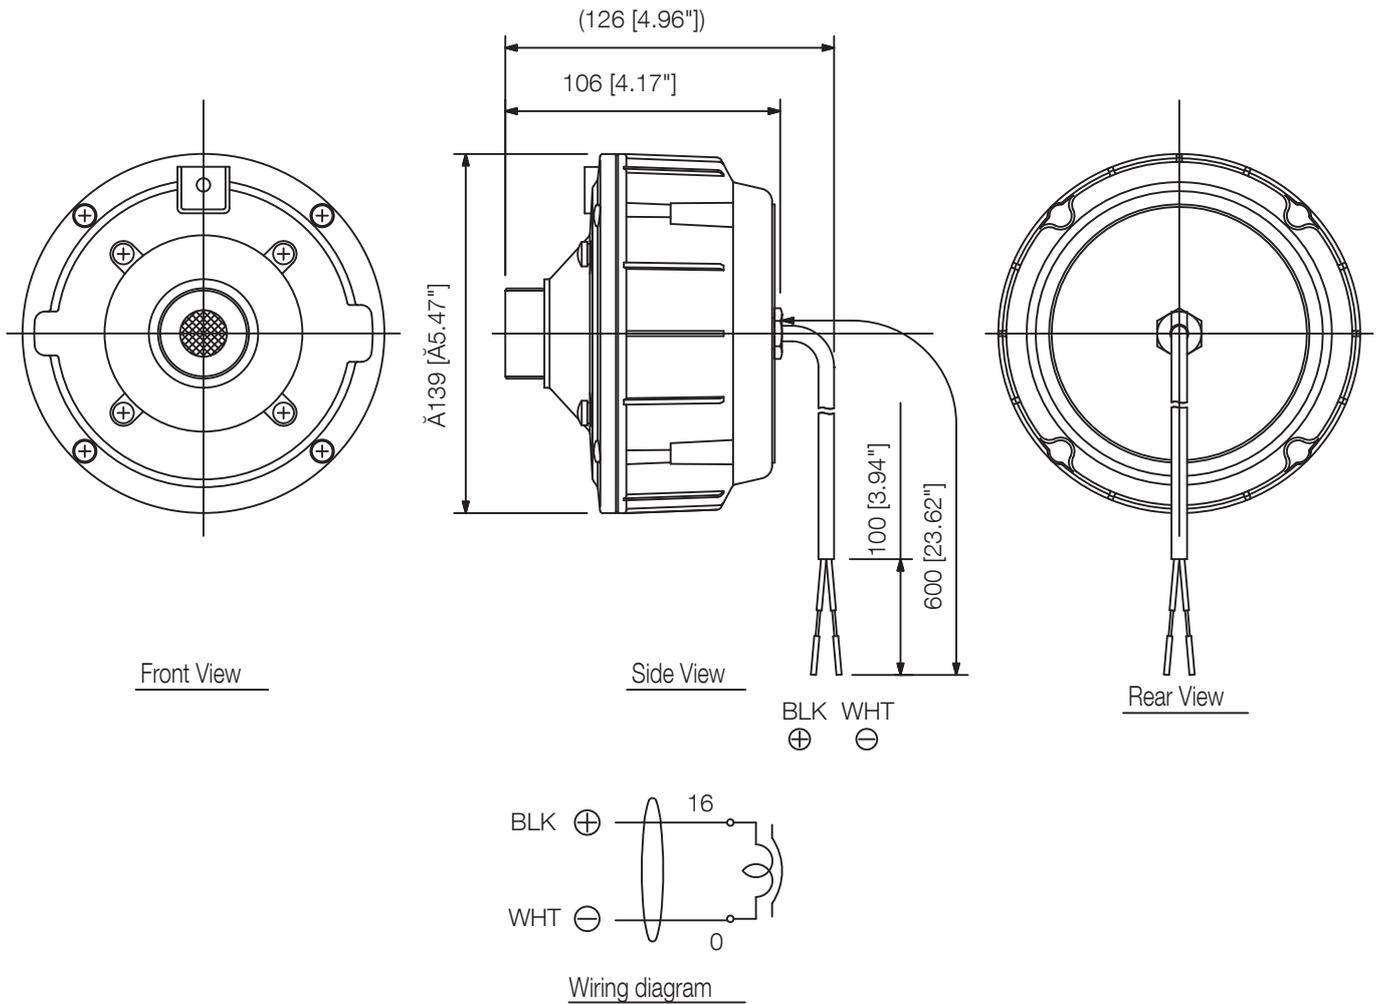

UNIT:mm SCALE:1/3