

# TS-919B1

BRIDGE UNIT

The TS-919B1 is a Bridge unit for connecting a single Wired Conference unit of the TS-811, TS-911, TS-812, or TS-912. It connects to the conference unit with a Category 5 cable.



Article number:TS-919B1


## Specifications

Power source.	24 V DC supplied from the optional TS-918 Expansion Unit
Power source.	24 V DC supplied from the optional TS-918 Expansion Unit
Current consumption (value)	16,0 mA
Connection	Communication cable connection terminal:RJ45 connector × 2Conference unit connection terminal: RJ45 connector
Current consumption	16 mA
Finish.	ABS resin, black,


# TS-919B1

BRIDGE UNIT


Appearance




Top View




Left Side View

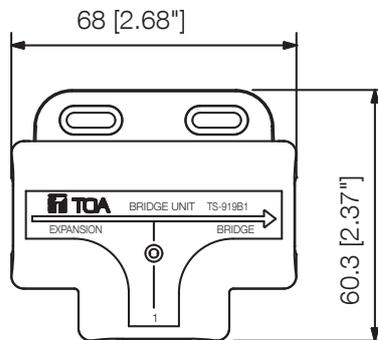

Front View



Right Side View



Bottom View

UNIT:mm

SCALE:1/2