

TS-918

EXPANSION UNIT

The TS-918 is an interface necessary for incorporating the Wired conference unit(s) in the conference system. It is connected to the TS-910 Central unit with a coaxial cable and to the TS-919B1 or TS-919B4 Bridge unit with a Category 5 cable. With the use of an optional rack mounting bracket, it can be mounted in an EIA Standard equipment rack (1 unit size).



Article number: TS-918 CE


Specifications

Power source.	100 - 240 V AC, 50 / 60 Hz use of the supplied AC Adapter
Power source.	100 - 240 V AC, 50 / 60 Hz use of the supplied AC Adapter
Power / current consumption	74.4W
Current consumption (value)	3,1 A
Power / current consumption	74.4W
Connection	Central unit connection terminal: BNC jack; Bridge unit connection terminal: RJ45 connector
Current consumption	3.1 A
Finish.	Aluminium, 30 % gloss, melamine-baked paint, black,

TS-918

EXPANSION UNIT

Appearance

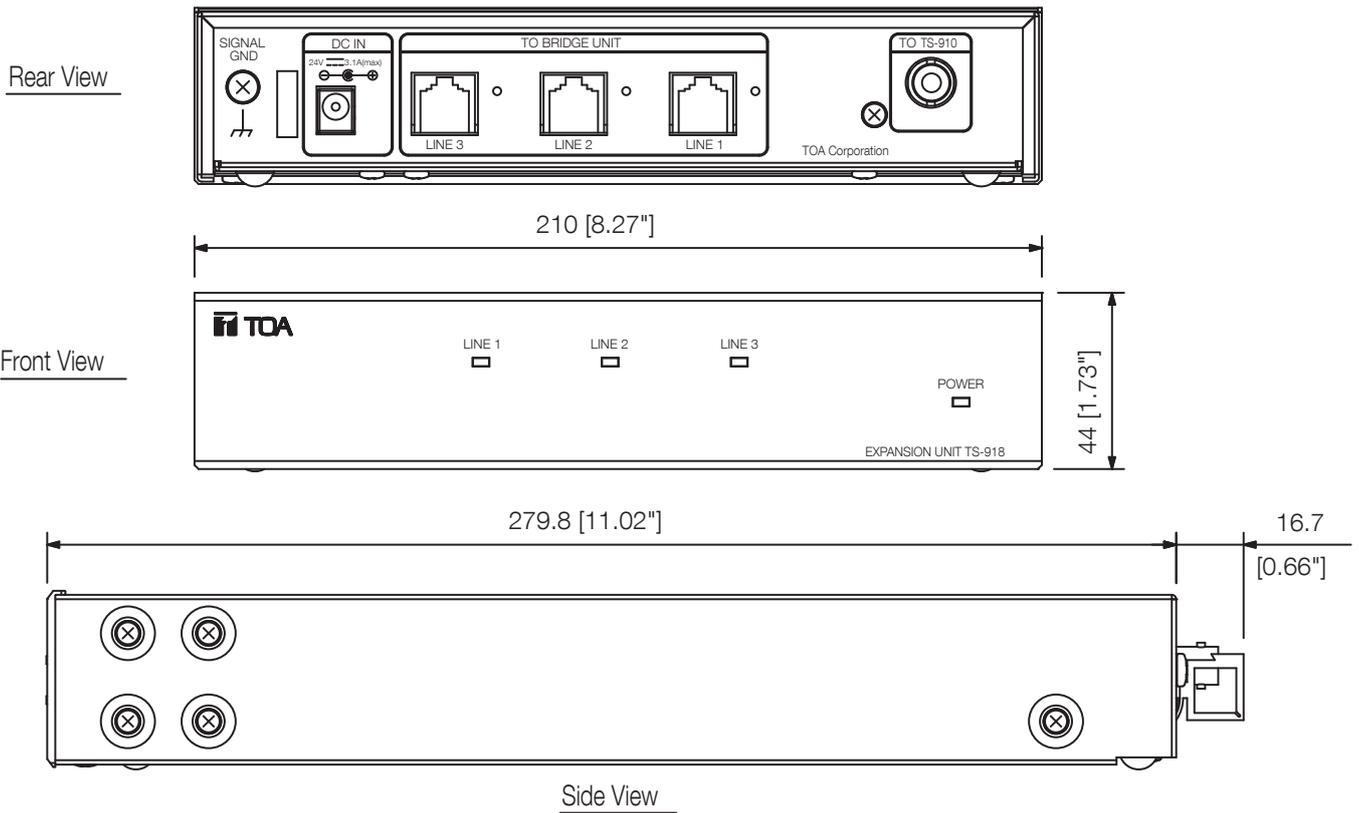

UNIT:mm

SCALE:1/2

Version	CE	CE-AU	CE-GB	CN	US
AC plug	