



BENEFITS

- Hardened steel clamp. High resistance.
- Zinc plated steel rod.
- Hexagonal screw DIN 933, 8.8 quality.
- ISO 4753 approval.
- UL and FM homologation.
- Clamp opening up to 18 mm.


APPROVALS




BASE MATERIALS

- Steel beams

INSTALLATION PROCEDURE

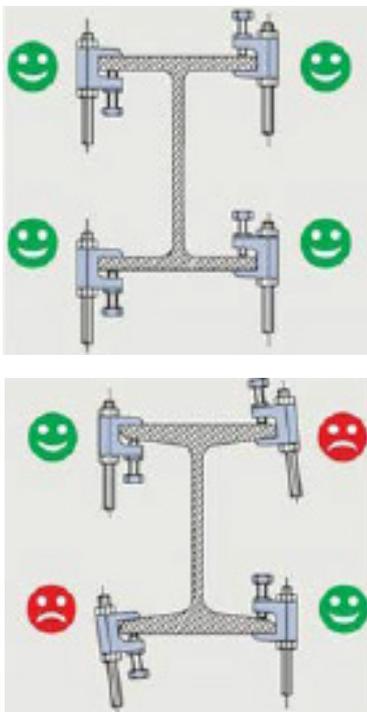


MAIN DIMENSIONS [mm]

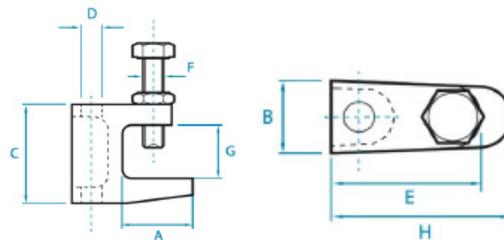

Ref.	A	B	C	D	E	F	G	H
M8	21	19	35	M8	35	M8	18	38
M10	29	21	45	M10	41	M10	23	50
M12	32	23.5	54	M12	48	M10	26	58

APPLICATIONS

Fixing of thread rods and other threaded elements in steel with maximum thickness of 26 mm.

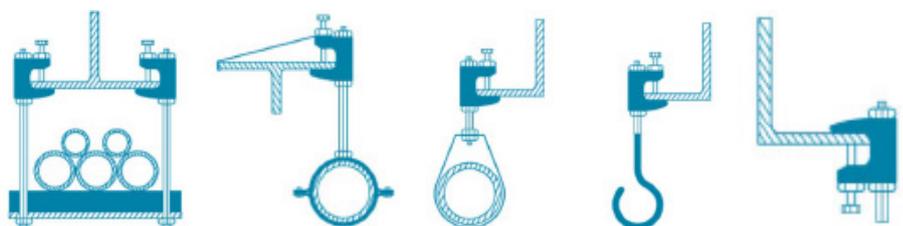

● Small Things Matter ●