


Product Code

F09448

DUOX PLUS VEO-XS 4.3" MONITOR

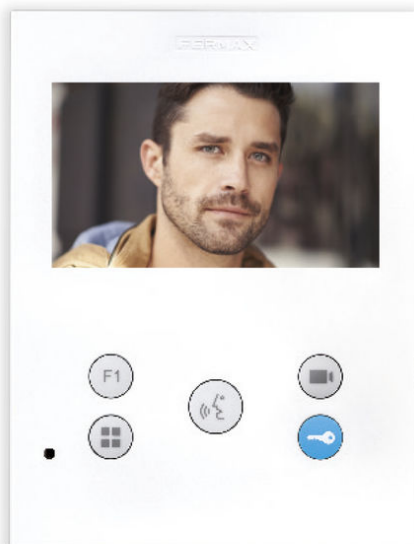

Reference

9448

EAN

8424299094489

Description.

Description

VEO-XS hands-free monitor. It is characterized by its small size and thickness, extra-flat. Thanks to its OSD menu and the layout of the buttons, its interaction with the user is simple and intuitive. Made of high impact ABS plastic. Textured finish for easy cleaning and UV protection to make it more resistant to sunlight.

The VEO-XS features a 4.3 "(16: 9) color widescreen display. Its balanced design with clean lines is distinctive, modern and minimalist. VEO-XS blends into the environment. When a call comes in, the picture appears automatically. When the conversation button is pressed, the conversation with the visitor begins. The image disappears automatically after 90 seconds or when the button is pressed again. To open the door, press the key button.

ACCESSORIES:

CONNECTOR

- 9447 DUOX PLUS MONITOR CONNECTOR

- For mounting the monitor on the wall surface.

REPLACEMENT

- 3388 UNIVERSAL FRAME 120X240
- Extra flat format, made of high impact ABS plastic, it has a fine textured finish. In replacement, it allows to cover the gap left by previous equipment.
- Dimensions 120 x 240 x 10 mm.

3389 UNIVERSAL FRAME LARGE 210x240

- Dimensions: 210 x 240 x 10 mm

Technical Details

GENERAL CHARACTERISTICS

- Technology: DUOX PLUS (non-polarised 2 wire full digital system)
- Audio/Video system: Audio/Video Color
- Set-up (Installation): Surface mounted (order connector ref. 9447 separately)
- Desktop support: Yes (ref. 9420)
- Hands-free communication: Yes
- Press-to-talk communication configurable: Yes
- Induction loop included: No (order monitor ref. 9458 with induction loop)
- Screen dimensions: 4,3" (Panoramic 16:9)
- Screen resolution (H x V): 480 x 272
- Color of the product: Matt white
- Number of pushbuttons: 5
- Kind of pushbuttons: Mechanical (silicone)
- Number of leds for lighted indications: 3 (red, blue, green with different states)

PROGRAMMING OF THE TERMINAL ADDRESS

- From the terminal: From the OSD menu
- From the outdoor panel or guard unit: Yes
- From the outdoor panel throughout the apartment door bell: Yes

FEATURES

- Automatic picture capture when the visitor calls (PHOTOCALLER): Yes (1 photo/call, until 150 photos, 368 x 288 pixels). This feature can be enabled by the user. Disabled by default.
- Guard unit call: Yes (by means of the door release button)
- Auto-on: Yes (with 3 outdoor panels/cameras)
- OSD menu: Yes

- Additional function F1: Yes (Button F1 sends a negative and/or command)
- Additional function F2: Yes (it only sends command, no negative)
- Apartment door bell differentiated from the outdoor panel: Yes
- Connection for additional devices (call extension, light/buzzer activator, etc.): Yes (ref. 2040, ref. 2438, ref. 3267)
- Additional terminals on the same address: Yes, max. 2 additional terminals (additional power supply can be required)
- Doormatic (automatic door release for offices, etc.): Yes (configurable until 12h). Green Led ON.

ADJUSTMENTS

- Date and time: Yes
- Ring tones selection: Yes (5). Configurable for Block Panel 0, Block Panel 1, General Entrance Panel 0 and Concierge unit.
- Call volume control: Yes (10 levels by OSD menu)
- Do-not-disturb mode: Yes (by OSD menu) + Red led indication
- Audio volume control: Yes (10 levels by OSD menu)
- Brightness, color and contrast control: Yes (by OSD menu)

TECHNICAL FEATURES

- Product dimensions (width x height x depth) mm: 125 x 165 x 21
- Time to answer or open the door since the call is done: 30 s.
- Conversation time: 90 s.
- Conversation privacy: Yes
- Voltage: 18-24 Vdc
- Maximum consumption: 6.5 W (14,4W in ref. 9458 if the induction loop is on)
- Standby consumption: 0.8 W
- Working temperature (°C, °F); Humidity: [-5°C, +40°C][23°F, 104°F]; [0%, 90%]
- Line adaptor included in the terminal: Yes (A, C, default position OFF)
- Connections: Bin, Bin, Bout, Bout, -, A+, F1, T

CALL FORWARDING (MOBILE & TABLET APP)

DuoxMe call forwarding (with a subscription model) available at Connected Facilities located in Spain.

Details.

Product measurements (height x width x depth) mm	Weight (kg)	Packaging measurements (height x width x depth) cm	Video Door Entry system Technologie
165 x 125 x 21	0.2767	17x12,8x4	DUOX

Manuals

- 970142Ag Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Eg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Fg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Ig Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Pg Guia rap Usuario Monitor VEO XS V10_23.pdf
- 970142Yg Guia rap Usuario Monitor VEO XS V05_25.pdf
- 970157Eld_Monitor_VEO_XS_duox_V10_23.pdf
- 970157FAd_Monitor_VEO_XS_duox_V10_23.pdf
- 970157Pd_Monitor_VEO_XS_duox_V10_23.pdf
- 970157Yd Monitor VEO XS duox V05_25.pdf
- 970158c Guia rap monitor VEO XS duox NEW V05_25.pdf

Declaration of conformity

- DOCF09448EN-FCC.pdf
- DOCF09448EN.pdf

Accessories



F09447

DUOX PLUS CONNECTOR



F02040

ELECTRONIC EXTENSION CALL



F03388

UNIVERSAL FRAME



F03389

UNIVERSAL FRAME LARGE



F09420

VEO-XS/VEO-XL MONITOR DESKTOP
SUPPORT

Training video

- <https://youtube.com/playlist?list=PLf1YNFmssC37H-1CN64lo6ND28rmVsQit>