




Features

- Fast and stable fixing system to metal beams.
- Quickly installs with just a hammer without drilling nor welding.
- Zinc flake clamps and clips resistant to corrosion in salt water mist for up to 480 hours (DIN 50021).
- Multifunctional due to two M6- internal threads, two clearance holes 6,3 mm and one clearance hole 10.7 mm.
- Grey for high resistance to corrosion

Certificates and approvals



Main dimensions

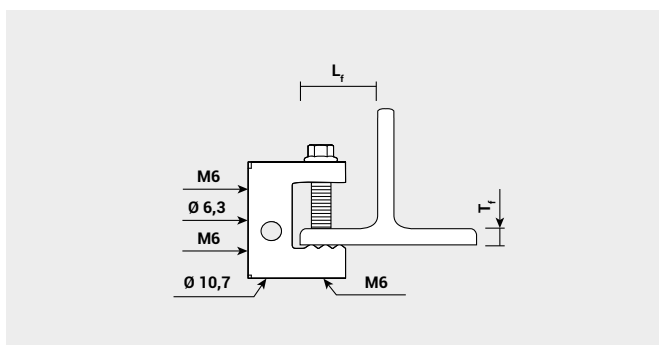

Reference	T _f [mm]	L _f [mm]
CMV M6	< 16	10,7

Base materials

- Steel beams

Installation procedure



Material

- Carbon steel for springs (DIN 17222).

Recommended loads

Reference	Recommended loads [kN]
CMV M6	0,45

Recommended load with safety factor ($\mu = 3$). The shown loads are the based on the static limit on vertical installation.