




Features

- Fast and stable fixing system to metal beams.
- Quickly installs without drilling or welding simply by tightening the screw.
- Can be used directly, as the clamp, hexagon head screw and lock nut are preassembled.
- Versatile.
- Material: Galvanised malleable cast iron (ISO 4042). Zinc plated steel rod.
- Hexagonal screw DIN 933, 8.8 quality.

Certificates and approvals



Main dimensions

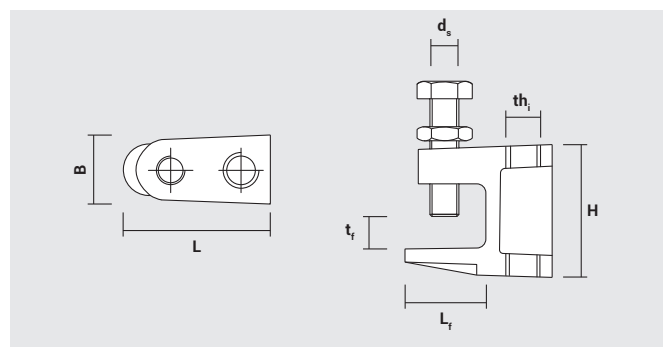


Reference	L [mm]	ds	Tr [mm]	Lr [mm]	B [mm]	H [mm]	th
98PMV	38	M8	18	21	19	35	M8
910PMV	50	M10	23	29	21	42	M10
912PMV	58	M12	26	32	23,5	54	M12

Base materials

- Steel beams

Installation procedure

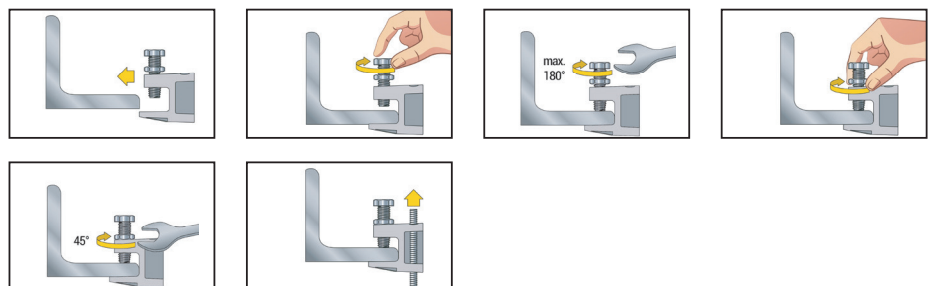

Recommended loads

Reference	Recommended loads [kN]
98PMV	1.2
910PMV	2.5
912PMV	3.5

Recommended load with safety factor ($\mu = 3$). The shown loads are the based on the static limit on vertical installation.