



UDF Cable Clip

0.0 Sheet thickness 0.0 mm

 E-90 system

Information

Usage



Direct fixing of cables to walls and ceilings.

Material

G - galvanised Available finishes: FP - galvanised according to the zinc flake method PN-EN ISO 10683:2018-11 L - painting in standard RAL colour

Additional information

NOTE: Hot-dip galvanizing method (PN-EN ISO 1461:2011) and thermal diffusion galvanizing method (PN-EN ISO 17668:2016) for elements not longer than 200 mm will be replaced by a new zinc flake coating method acc. to PN-EN ISO 10683:2014-09.

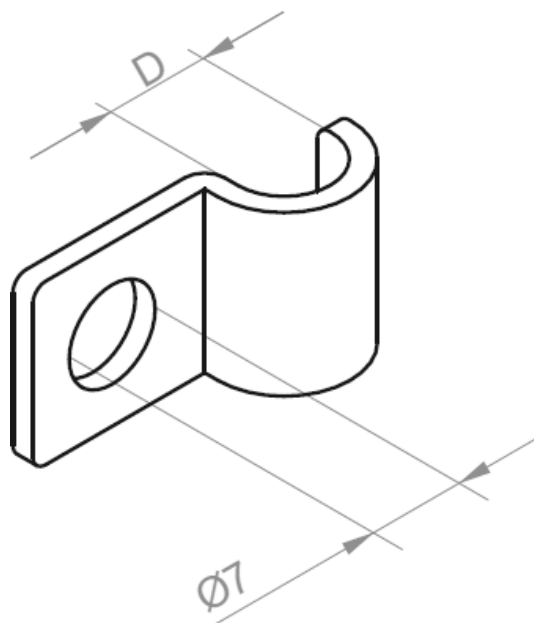



Product versions

Symbol	Catalogue number	Size d (mm)	Sheet thickness (mm)	Quantity (pcs.)
UDF5	405505	5	1.2	100
UDF6	405506	6	1.2	100
UDF7	405507	7	1.2	100
UDF8	405508	8	1.2	100
UDF9	405509	9	1.2	100
UDF10	405510	10	1.2	100
UDF12	405512	12	1.2	100
UDF14	405514	14	1.2	100
UDF15	405515	15	2	100
UDF18	405518	18	2	100
UDF16	405516	16	2	100
UDF20	405520	20	2	100
UDF22	405522	22	2	100
UDF25	405525	25	2	100
UDF26	405526	26	2	100
UDF28	405528	28	2	100
UDF32	405532	32	2	100
UDF33	405533	33	2	100
UDF35	405535	35	2	100
UDF36	405536	36	2	100
UDF40	405540	40	2	100
UDF42	405542	42	2	100