



OZM/OZMO Cable Hanger

0.7 Sheet thickness 0.7 mm

E90 E-90 system  fast assembly

Information

Usage

Suspending cable cables to the ceiling and wall.

Material

S - Sendzimir method galvanised steel PN-EN 10346:2015-09


Available finishes: FP - galvanised according to the zinc flake method

PN-EN ISO 10683:2018-11 E - stainless steel L - painting in standard

RAL colour

Additional information

– direct mounting with: SROM6x30, SRBOM6x30 + NSM6 + PP6, KWBO6x35 or KWBO6x40, GSO6x40, KSKOM6, KKG5x37 or KKG5x65, MKR6x32, PSROM6x45 or PSROM6x50. – indirect mounting using PGM6 threaded rod/... + NSM6 + PP6 and M6 expansion sleeves – snap clamp closing for easy adding or replacing cables

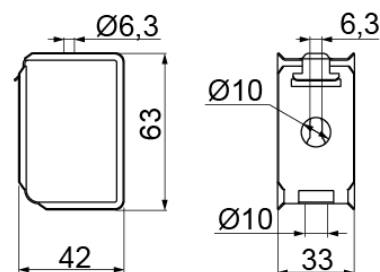

Product versions

Symbol	Catalogue number	Obciążenie maksymalne F max (kN/m)	Weight 1 pc. (kg)	Quantity (pcs.)
OZM/OZMO	753200	0.01	0.08	100

