



OZS/OZSO Cable Hanger

1.2 Sheet thickness 1.2 mm

E90 E-90 system  fast assembly

Information

Usage

Suspending cable cables to the ceiling and wall.

Material

S - Sendzimir method galvanised steel PN-EN 10346:2015-09

Available finishes: FP - galvanised according to the zinc flake method

PN-EN ISO 10683:2018-11 E - stainless steel L - painting in standard

RAL colour



Additional information

Safe working load: see Safe Loads Table

Standard spacing of supports: 0.3m

Upgraded standard of supports – 0.6m For the installation use the following bolt options:

- SROM6x30
- SRBOM6x30 + NSM6 + PP6
- KWB06x35 or KWB06x40
- GSO6x40
- KSKOM6
- KKG5
- MKR6x32
- PSROM6x45 or PSROM6x50

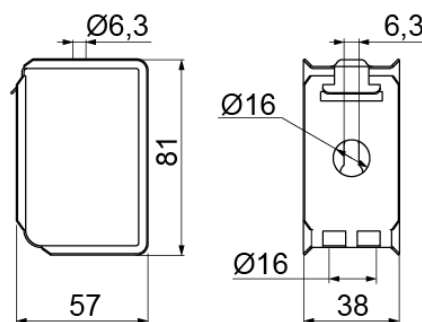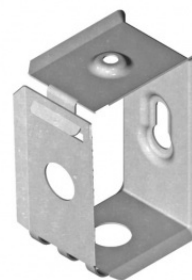

Product versions

Symbol	Catalogue number	Obciążenie maksymalne F max (kN/m)	Weight 1 pc. (kg)	Quantity (pcs.)
OZS/OZSO	752500	0.02	0.12	100

