

The BS-1034 is a wall mount speaker that can be installed easily on the wall with help of the plug-in speaker receptacle.




Article number:BS-1034  
Alternative products: BS-1034S, BS-634,  
BS-634T


## Specifications

Sensitivity (1#V, 1#m)	90 dB SPL
Frequency response	120 Hz - 20 kHz
Rated input (high impedance)	10 W
Tappings	100 V : 1 k $\Omega$ (10 W) / 2 k $\Omega$ (6 W) / 3.3 k $\Omega$ (3W) / 10k $\Omega$ (1 W) 70 V : 500 $\Omega$ (10 W) /1 k $\Omega$ (5 W) / 2 k $\Omega$ (2.5 W) / 3.3 k $\Omega$ (1.5 W) / 10k $\Omega$ (0.5 W)
Speaker component	Low: 12 cm cone-type, High: Balanced dome-type
Finish	HIPS resin, off-white (RAL 9010 or equivalent),


Appearance

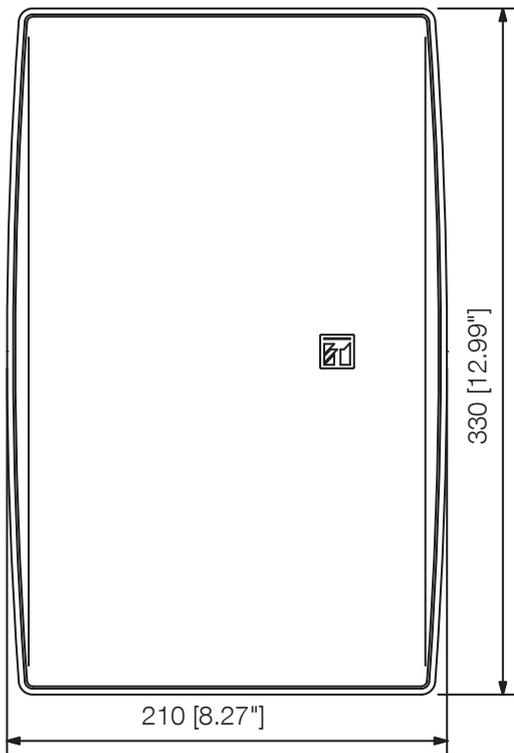

Front View

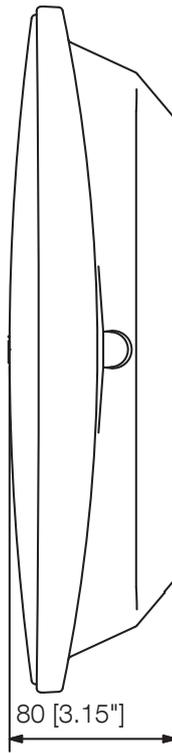

Side View

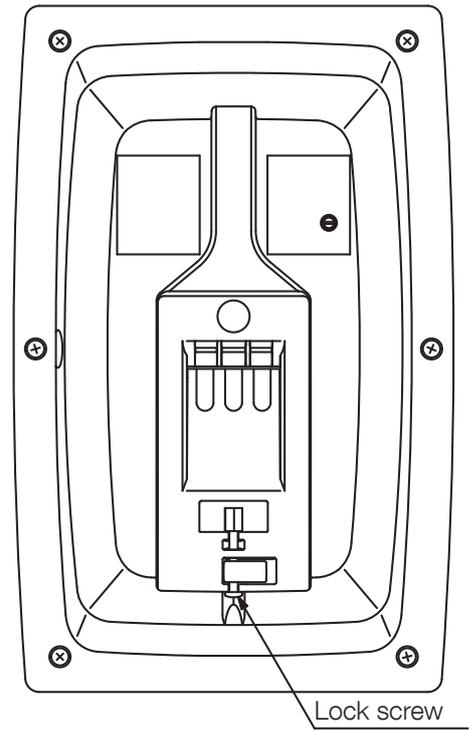

Rear View