

The BS-1110W Speaker is specifically designed to reproduce clear announcements. The speaker also features a wide horizontal directivity owing to the vertical arrangement of speaker units, distributing announcements to a wider area.




Article number: BS-1110W EU
Alternative products: BS-1120W

Specifications

Sensitivity (1#V, 1#m)	92 dB
Frequency response	150 Hz - 14 kHz
Connection terminal	Push-in connector (bridging connections possible)
Rated input (high impedance)	10 W
Tappings	10 W, 5W (100 V), 10 W, 5W (70 V), 4Ω
Rated input (low impedance)	10 W
Rated impedance	4 Ω
Speaker component	12 cm cone-type x 2
Finish	Plywood, ABS resin, vinyl coating, off-white (RAL 9010 or equivalent),
Operating temperature	-10°C to +50°C

Appearance

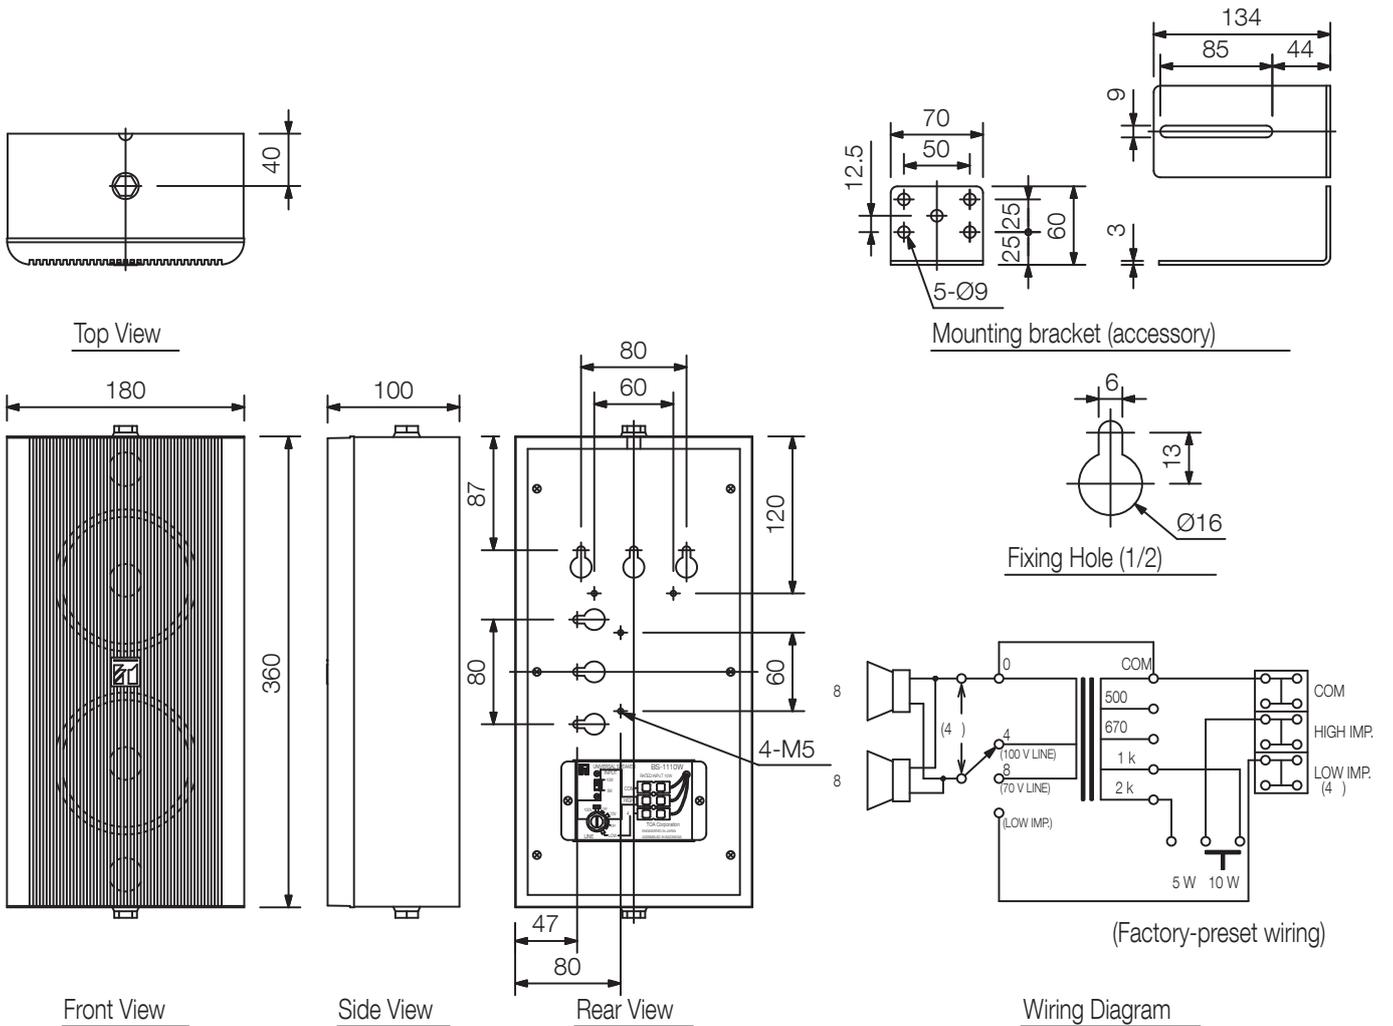

UNIT:mm SCALE:1/6