

The CS-304 outdoor speaker features stainless steel hardware for all-weather durability. It is designed to offer the high intelligibility of weather-resistant horns combined with the high sound quality of dynamic speakers. The CS-304 employs the rotary switch that facilitates impedance changes. It also employs a constant directivity horn for clear sound output over its horizontal range of 90° operation.




Article number: CS-304 EU
Alternative products: CS-64, CS-154

Specifications

Sensitivity (1#V, 1#n)	98 dB
Frequency response	120 Hz - 15 kHz
Rated input (high impedance)	30 W
Tappings	100 V : 330 Ω (30 W) / 500 Ω (20 W) / 1 kΩ (10 W) 70 V : 170 Ω (30 W) / 330 Ω (15 W) / 500 kΩ (10 W) / 1 kΩ (5 W)
Speaker component	12 cm cone-type
Finish	ABS resin, paint, off-white (RAL 9010 or equivalent), Bracket: Stainless steel
Operating temperature	-10 °C to +55 °C

Appearance

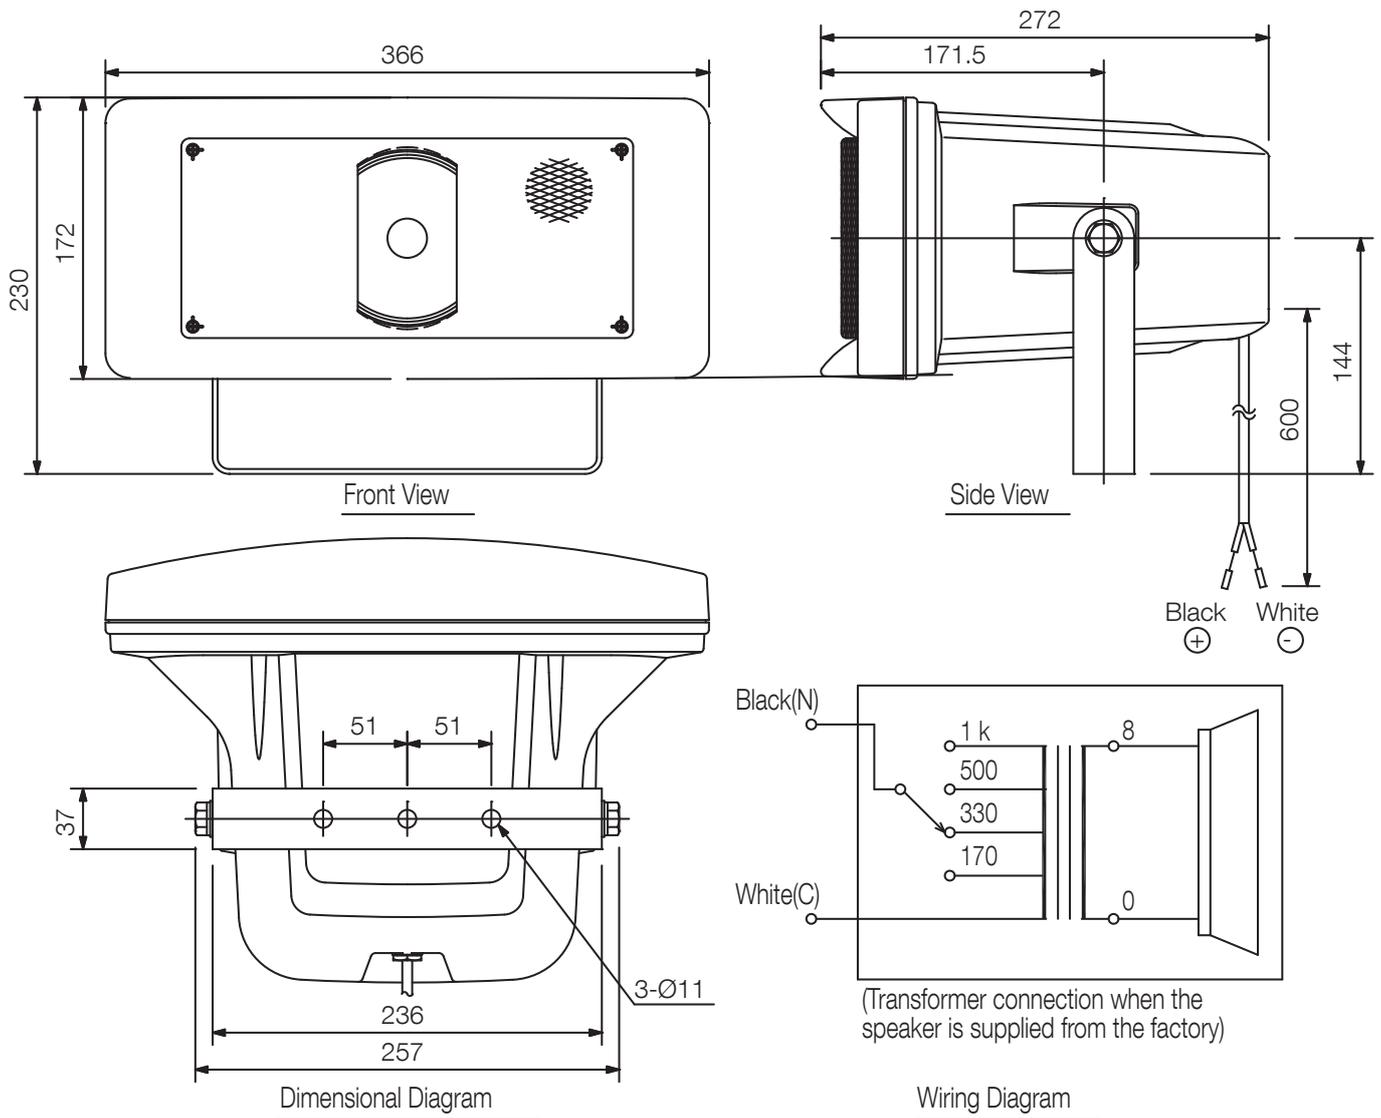

UNIT:mm

SCALE:1/5