

F-1522SC

PANEL CONE SPEAKER

The F-1522SC ceiling and wall-mounted speaker covers an extremely wide area and can be used for 25, 70 and 100 V line applications. Well-balanced sound can be heard uniformly at any location.



Article number: F-1522SC EU
Alternative products: F-1522SC, F-2352C


Specifications

Sensitivity (1#V, 1#m)	88 dB
Frequency response	65 Hz - 18 kHz (-10 dB)
Rated input (high impedance)	6 W
Tappings	6 / 3 W (100 V), 6 / 3 / 1.5 W (70 V), 8 Ω
Rated input (low impedance)	Continuous pink noise: 9 W (8 Ω), Continuous program: 18 W (8 Ω)
Rated impedance	8 Ω
Speaker component	10 cm cone-type
Finish	Steel plate, Fire-resistant ABS resin (resin material grade: UL-94 V-0), white,


F-1522SC

PANEL CONE SPEAKER


Appearance

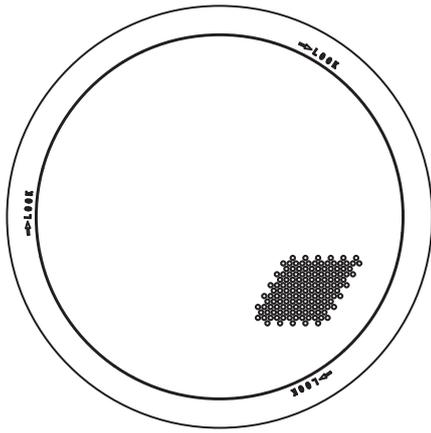


Front View

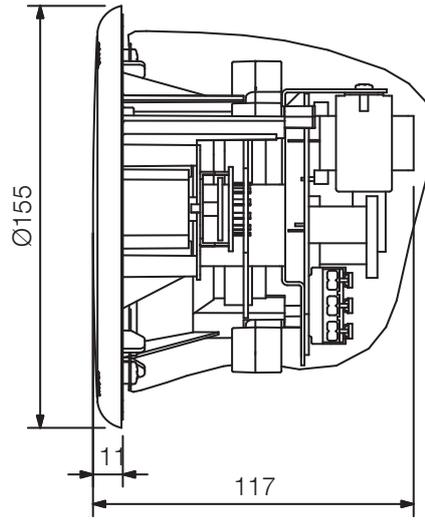

Side View

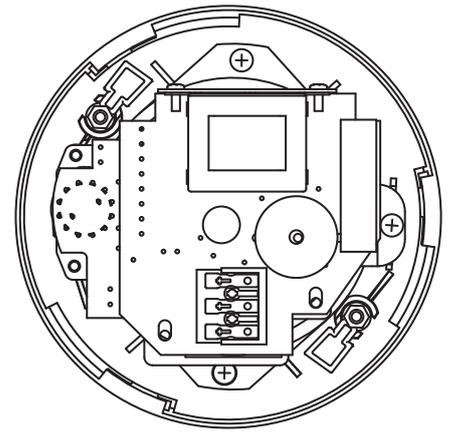

Rear View

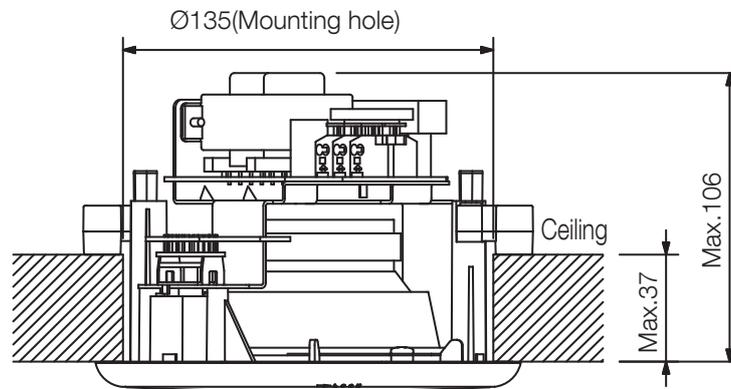

Ceiling mounting

UNIT:mm

SCALE:1/3