

SN-IPV57/41UDR/Z


4MP Motorized Vandal Network IR Dome



Key features

- 1/3" Progressive Scan CMOS
- Motorized Lens 2.8-12mm
- 4MP@20fps,3MP@30fps,1080P@30fps
- Triple Streams
- Smart IR Range 15-20m
- Low bitrate ,Excellent low light performance
- WDR,3D DNR
- ROI,Defog,HLC,Corridor mode,DIS

Dimension

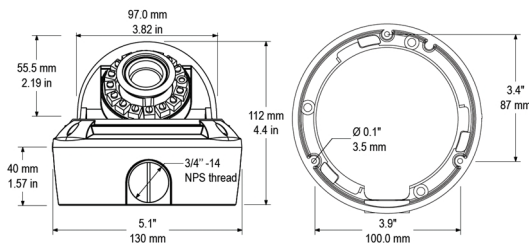

Accessories



SN-CBK629 SN-CBK633 SN-CBK623 SN-CBK624

SN-CBK627 SN-CBK625 SN-CBK626 SN-CBK633B

Specifications

| CAMERA | |
|-------------------------|--|
| Image Sensor | 1/3" Progressive Scan CMOS |
| Min. illumination | Color 0.05Lux; IR ON 0 Lux |
| Day & Night | ICR |
| Shutter Speed | 1/5-1/20000 |
| Auto Iris | Yes |
| Wide Dynamic Range | WDR>120dB |
| Digital Noise Reduction | 2D/3D |
| Lens | Motorized Lens 2.8-12mm |
| FOV | 89° ~ 35° |
| IR LED | 15pcs |
| IR Range | 15-20m |
| IMAGE | |
| Video Compression | H.264/265, MJPEG |
| Bit Rate (CBR/VBR) | Main stream:500kb-12000kb ;Sub stream 100kb-6000kb |
| Audio Compression | G.711 ,RAW_PCM |
| Max.Resolution | 2592*1520/2560*1440/20fps,2304*1296/30fps,1920x1080/30fps |
| Stream | Stream1 2592*1520/2560*1440/2304*1296/1920x1080 Stream 2 D1 to QVGA |
| Image Setting | Rotate Mode,Saturation,Brightness,Contrast,Sharpness |
| HLC | Yes |
| 9:16 Corridor mode | Yes |
| DIS | Auto |
| ROI | Yes |
| Defog | Yes |
| NETWORK | |
| Network Protocols: | HTTP,HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported. |
| Alarm Trigger | Motion Detection, Network disconnect,Disk alarm,I/O alarm |
| RTSP Video | Standard RFC2326, Support QuickTime / VLC Player. |
| Security | User security authentication, Reset, Hardware WatchDog |
| Web Language | English, Chinese,Polish, Italian, Portuguese, Spanish.(Sunell Brand) |
| System Compatibility | Onvif ,CGI |
| INTERFACE | |
| Ethernet | 1 Ethernet (10/100 Base-T) RJ-45 Connector |
| Audio I/O | 1ch Audio In&1ch Audio Out |
| Alarm I/O | 1ch Alarm In&1ch Alarm Out |
| RS485 | Optional |
| BNC Output | Yes |
| Reset Button | Yes |
| Edge Storage | Micro SD/SDHC/SDXC slot ,Max 128GB |
| GENERAL | |
| Power Supply | DC12V/POE(AC24V Optional) |
| Power Consumption | 3W(IR LED OFF); 5W (IR LED ON) |
| OperatingTemperature | -30℃ ~+60℃ |
| Operating Humidity | 0% - 90% RH |
| Ingress Protection | IP66, IK10 |
| Approvals | CE / FCC |
| Product Dimensions | φ 130×112mm |
| Product Weight | 900g |