



ELV-65



ELV-65 is one-sided guide light designed particularly for humid and dusty environments. It is IP66 rated and has a viewing distance of 26 metres. Plastic body is impact-resistant polycarbonate. It uses a powerful LED module as a light source. Light fitting can be wall or ceiling mounted.

Two-sided diffuser is available as an option. It enables mounting the luminaire horizontally or vertically. With the diffuser, the guide luminaire is IP65 rated and has a viewing distance of 30 metres.

Typical applications for the luminaire include car parks as well as warehouse and production facilities.

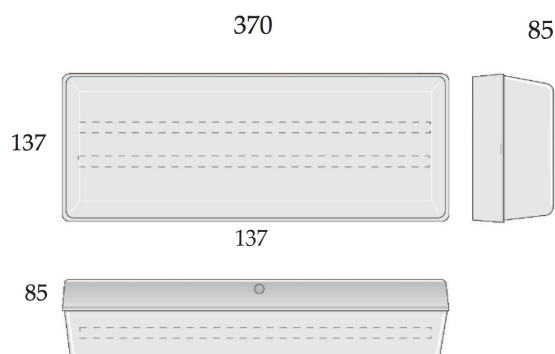



EXIOT LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELV-65W-A	4129204	230 V	2 W	LED	66	26 m	MMJ 3x1,5mm2	Li-Ion 7,4 V / 600 mAh
ELV-65W-O	4129205	230 V	2 W	LED	66	26 m	MMJ 3x1,5mm2	Li-Ion 7,4 V / 600 mAh
ELV-65W-V	4129206	230 V	2 W	LED	66	26 m	MMJ 3x1,5mm2	Li-Ion 7,4 V / 600 mAh

ADDRESSABLE LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELV-65C-A	4212724	65 V DC	2 W	LED	66	26 m	-o- KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELV-65C-O	4218908	65 V DC	2 W	LED	66	26 m	-o- KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELV-65C-V	4218909	65 V DC	2 W	LED	66	26 m	-o- KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELV-65P-A	4212725	65 V DC	2 W	LED	66	26 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELV-65P-O	4218910	65 V DC	2 W	LED	66	26 m	FFRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELV-65P-V	4218911	65 V DC	2 W	LED	66	26 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system

24V AND 230V LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELV-65L-A	4212639	230 V AC/DC	3 W	LED	66	26 m	-o- 3x2,5mm2	Central battery system
ELV-65L-O	4212640	230 V AC/DC	3 W	LED	66	26 m	-o- 3x2,5mm2	Central battery system
ELV-65L-V	4212641	230 V AC/DC	3 W	LED	66	26 m	-o- 3x2,5mm2	Central battery system
ELV-65L/24-A	4212642	24 V DC	3 W	LED	66	26 m	-o- 3x2,5mm2	Central battery system
ELV-65L/24-O	4212643	24 V DC	3 W	LED	66	26 m	-o- 3x2,5mm2	Central battery system
ELV-65L/24-V	4212644	24 V DC	3 W	LED	66	26 m	-o- 3x2,5mm2	Central battery system