


ELX-1 / 2 / 4




ELX guide luminaire has an ABS plastic body and brackets. Sign is made of acrylic. ELX guide luminaire is available with three different viewing distances: 24, 42 and 60 m. Luminaire is IP55 rated. Available in one and two-sided models.

ELX guide luminaire can be wall or ceiling mounted. A flush-mounting frame is also available.


Typical applications for ELX guide luminaires include office and business premises, day-care centres, schools, hospitals, health centres and sports halls. As the luminaire can reach a great IP rating with a seal flange, it is also used in humid and dusty applications, including car parks.

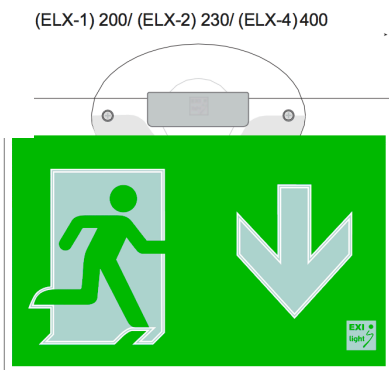


WALL MOUNTING

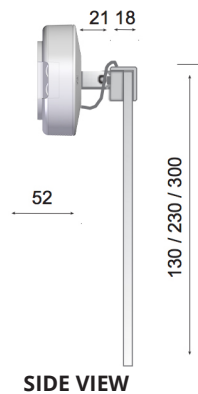

CEILING MOUNTING

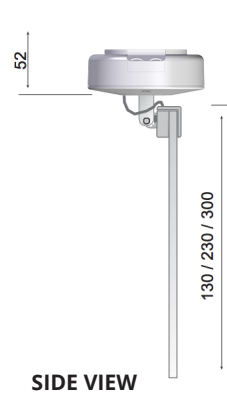

TOP VIEW





EXIOT LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELX-1W-A	4228688	230 V	2 W	LED	55	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-1W-AA	4228689	230 V	2 W	LED	55	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-1W-O	4228690	230 V	2 W	LED	55	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-1W-V	4228691	230 V	2 W	LED	55	24 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-A	4228692	230 V	2 W	LED	55	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-AA	4228693	230 V	2 W	LED	55	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-O	4228694	230 V	2 W	LED	55	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-2W-V	4228695	230 V	2 W	LED	55	42 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-A	4228696	230 V	2 W	LED	55	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-AA	4228697	230 V	2 W	LED	55	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-O	4228698	230 V	2 W	LED	55	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh
ELX-4W-V	4228699	230 V	2 W	LED	55	60 m	MMJ 3×1,5mm2	Li-Ion 7,4 V / 600 mAh

ADDRESSABLE LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELX-1C-A	4212712	65 V DC	2 W	LED	55	24 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-1C-AA	4218912	65 V DC	2 W	LED	55	24 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-1C-O	4218913	65 V DC	2 W	LED	55	24 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-1C-V	4218914	65 V DC	2 W	LED	55	24 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-1P-A	4212713	65 V DC	2 W	LED	55	24 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-1P-AA	4218915	65 V DC	2 W	LED	55	24 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-1P-O	4218916	65 V DC	2 W	LED	55	24 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-1P-V	4218917	65 V DC	2 W	LED	55	24 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-2C-A	4212714	65 V DC	2 W	LED	55	42 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-2C-AA	4218918	65 V DC	2 W	LED	55	42 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-2C-O	4218919	65 V DC	2 W	LED	55	42 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-2C-V	4218920	65 V DC	2 W	LED	55	42 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-2P-A	4212715	65 V DC	2 W	LED	55	42 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-2P-AA	4218921	65 V DC	2 W	LED	55	42 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-2P-O	4218922	65 V DC	2 W	LED	55	42 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-2P-V	4218923	65 V DC	2 W	LED	55	42 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-4C-A	4212718	65 V DC	2 W	LED	55	60 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-4C-AA	4218930	65 V DC	2 W	LED	55	60 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-4C-O	4218931	65 V DC	2 W	LED	55	60 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-4C-V	4218932	65 V DC	2 W	LED	55	60 m	KLMA 2x0,8+0,8	Li-Ion 7,4 V / 600 mAh
ELX-4P-A	4212719	65 V DC	2 W	LED	55	60 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-4P-AA	4218933	65 V DC	2 W	LED	55	60 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-4P-O	4218934	65 V DC	2 W	LED	55	60 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system
ELX-4P-V	4218935	65 V DC	2 W	LED	55	60 m	FRHF – JE-H(St) H..Bd 2x0,8+0,8	Central battery system



24V JA 230V LUMINAIRES

TYPE	ELECTRICAL NO. (FI)	VOLTAGE	POWER INPUT	LIGHT SOURCE	IP CLASS	RANGE	MOUNTING	BATTERY
ELX-1L-A	4212567	230 V AC/DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L-AA	4218828	230 V AC/DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L-O	4212568	230 V AC/DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L-V	4212569	230 V AC/DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L/24-A	4212570	24 V DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L/24-AA	4218868	24 V DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L/24-O	4212571	24 V DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-1L/24-V	4212572	24 V DC	3 W	LED	55	24 m	-o- 3×2,5mm2	Central battery system
ELX-2L-A	4212573	230 V AC/DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L-AA	4218829	230 V AC/DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L-O	4212574	230 V AC/DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L-V	4212575	230 V AC/DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L/24-A	4212576	24 V DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L/24-AA	4218869	24 V DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L/24-O	4212577	24 V DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-2L/24-V	4212578	24 V DC	3 W	LED	55	42 m	-o- 3×2,5mm2	Central battery system
ELX-4L-A	4212585	230 V AC/DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L-AA	4218831	230 V AC/DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L-O	4212586	230 V AC/DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L-V	4212587	230 V AC/DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L/24-A	4212588	24 V DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L/24-AA	4218999	24 V DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L/24-O	4212589	24 V DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system
ELX-4L/24-V	4212590	24 V DC	3 W	LED	55	60 m	-o- 3×2,5mm2	Central battery system