



The WM-D5300 is an ultraslim and lightweight beltpack transmitter designed for the digital wireless system WM-D5000.

.....



.....

Article number:WM-D5300 -G1 Alternative products: WM-D5300 -C7, WM-D5300 -G1

Specifications

Power source.	Battery 1x AA type, Alkaline, or WB-2000-2
Audio input	3.5 mm mini-jack (with screw-on cap)
Audio input	3.5 mm mini-jack (with screw-on cap)
Operating time	approx. 8 h
Frequency range	606 - 636 MHz
Selectable frequencies	78
Power source.	Battery 1x AA type, Alkaline, or WB-2000-2
Simultaneous channels	32
AF response	100 Hz - 12 kHz
Finish.	ABS resin, paint, black,
Operating humidity.	30 % - 85 %RH (no condensation)
Operating temperature.	-10 °C to +50 °C (14 °F to 122 °F) (except battery)


We supply sound, not equipment.

www.toa.eu.



WM-D5300 -G1

Appearance

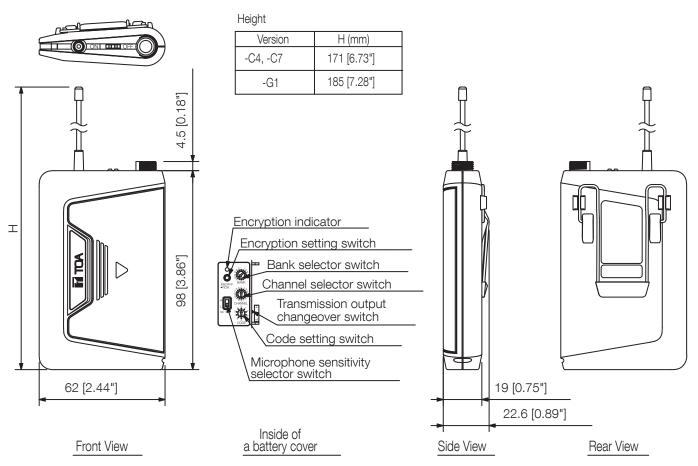

.....

UNIT:mm SCALE:1/2