

IR-520R

INFRARED WIRELESS RECEIVER

The IR-520R infrared wireless receiver is designed for exclusive use with the IR-702T infrared wireless tuner. It can be mounted to a wall or a microphone stand.



Article number:IR-520R Y
Alternative products: IR-510R, IR-500R


Specifications

Power source.	24 V DC (supplied from IR-702T)
Power source.	24 V DC (supplied from IR-702T)
Current consumption (value)	30,0 mA
Current consumption	30 mA
Wavelength	870 nm
Carrier frequency	Channel A: 3.100 MHz / Channel B: 3.350 MHz
Reception area	Approx. 15 m (8 m radius) in a space without any obstacles
Connection terminal	75 Ω, BNC jack
Finish.	Polycarbonate resin, ABS resin, black,

IR-520R

INFRARED WIRELESS RECEIVER

Appearance

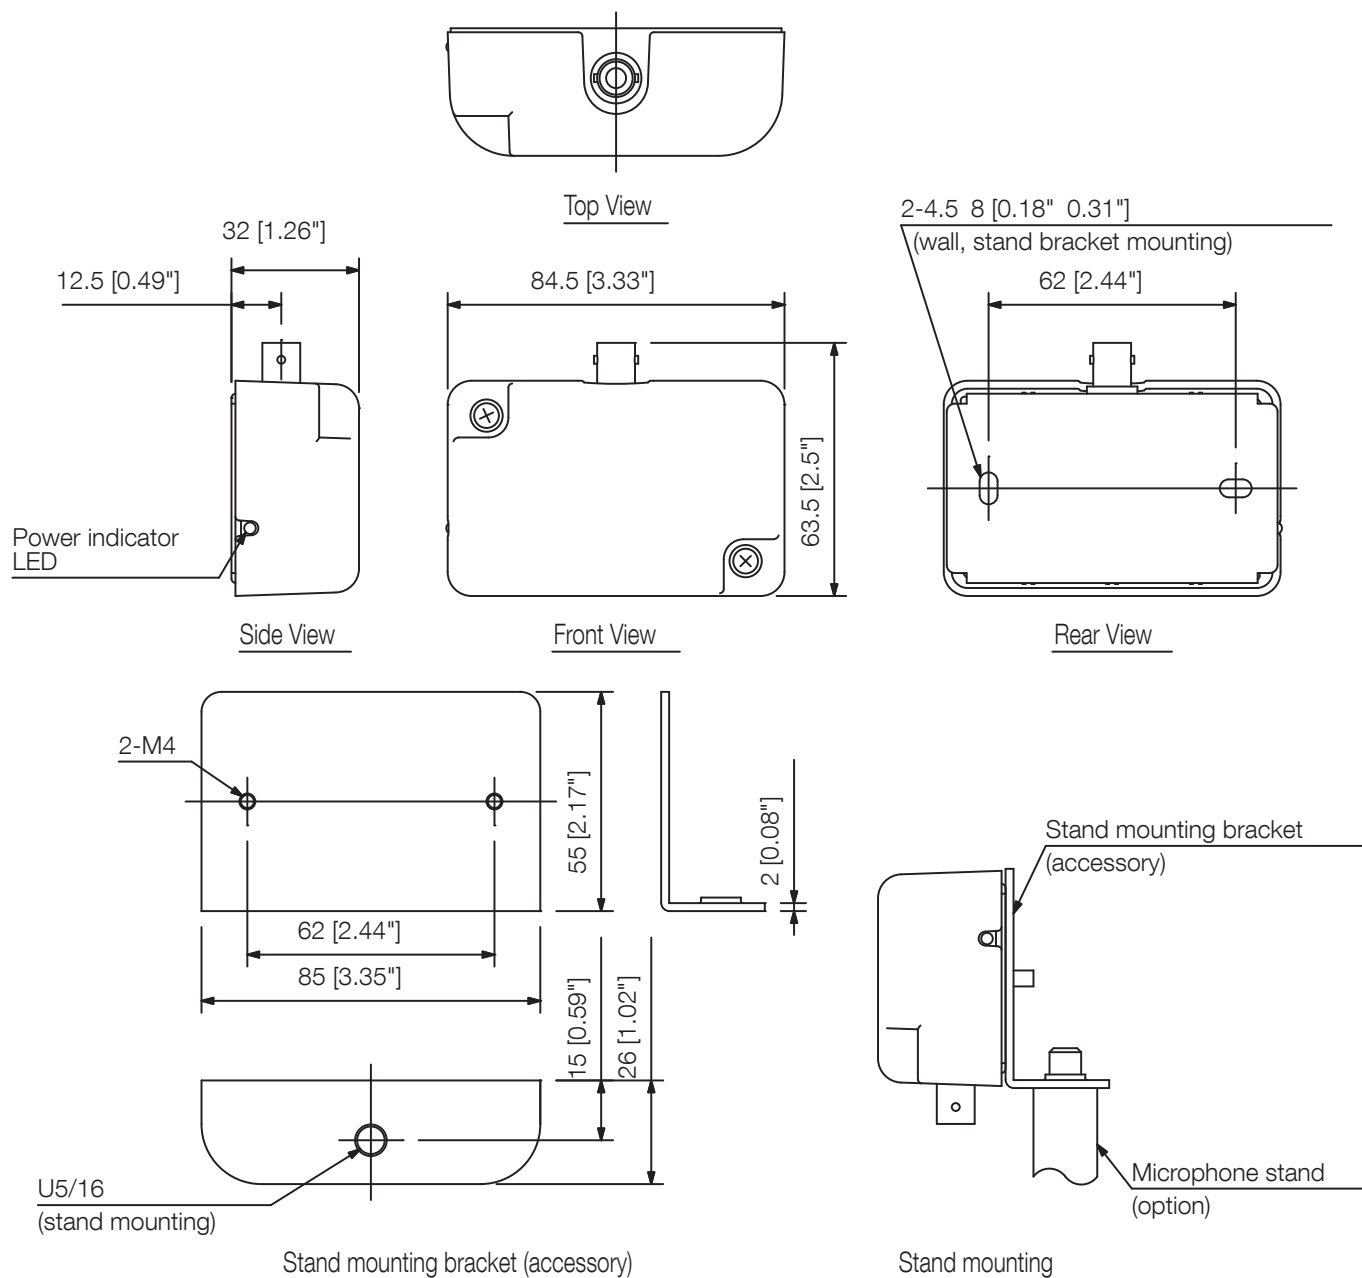

UNIT:mm

SCALE:1/2