

The PJ-304 is a projection speaker designed for ceiling and wall installations. Considered in architectural design, it can blend in with lighting equipment. The supplied swivel bracket allows for flexible speaker angle adjustment. The PJ-304 is driven on both high-impedance (100 V and 70 V) and low-impedance (8  $\Omega$ ) lines. The input power (impedance) can be easily changed at the upper side of the speaker. The speaker is easy to repaint so as to meet a wide range of design needs.




Article number: PJ-304  
Alternative products: PJ-64

### Specifications

Sensitivity (1#V, 1#m)	91 dB 500 - 5,000 Hz, pink noise
Frequency response	70 Hz - 20 kHz (peak -20 dB)
Connection	2-core cabtyre cord 60 cm with diameter of 6 mm
Rated input (high impedance)	30 W
Tappings	100 V : 330 $\Omega$ (30 W) / 500 $\Omega$ (20 W) / 670 $\Omega$ (15 W) / 1 k $\Omega$ (10 W) / 2 k $\Omega$ (5 W) 70 V : 170 $\Omega$ (30 W) / 250 $\Omega$ (20 W) / 330 $\Omega$ (15 W) / 500 $\Omega$ (10 W) / 1 k $\Omega$ (5 W) Low impedance: 8 $\Omega$
Speaker component	12 cm cone-type + balanced dome tweeter
Finish	HIPS resin, off-white (RAL 9010 or equivalent), Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent color), paint

### Appearance

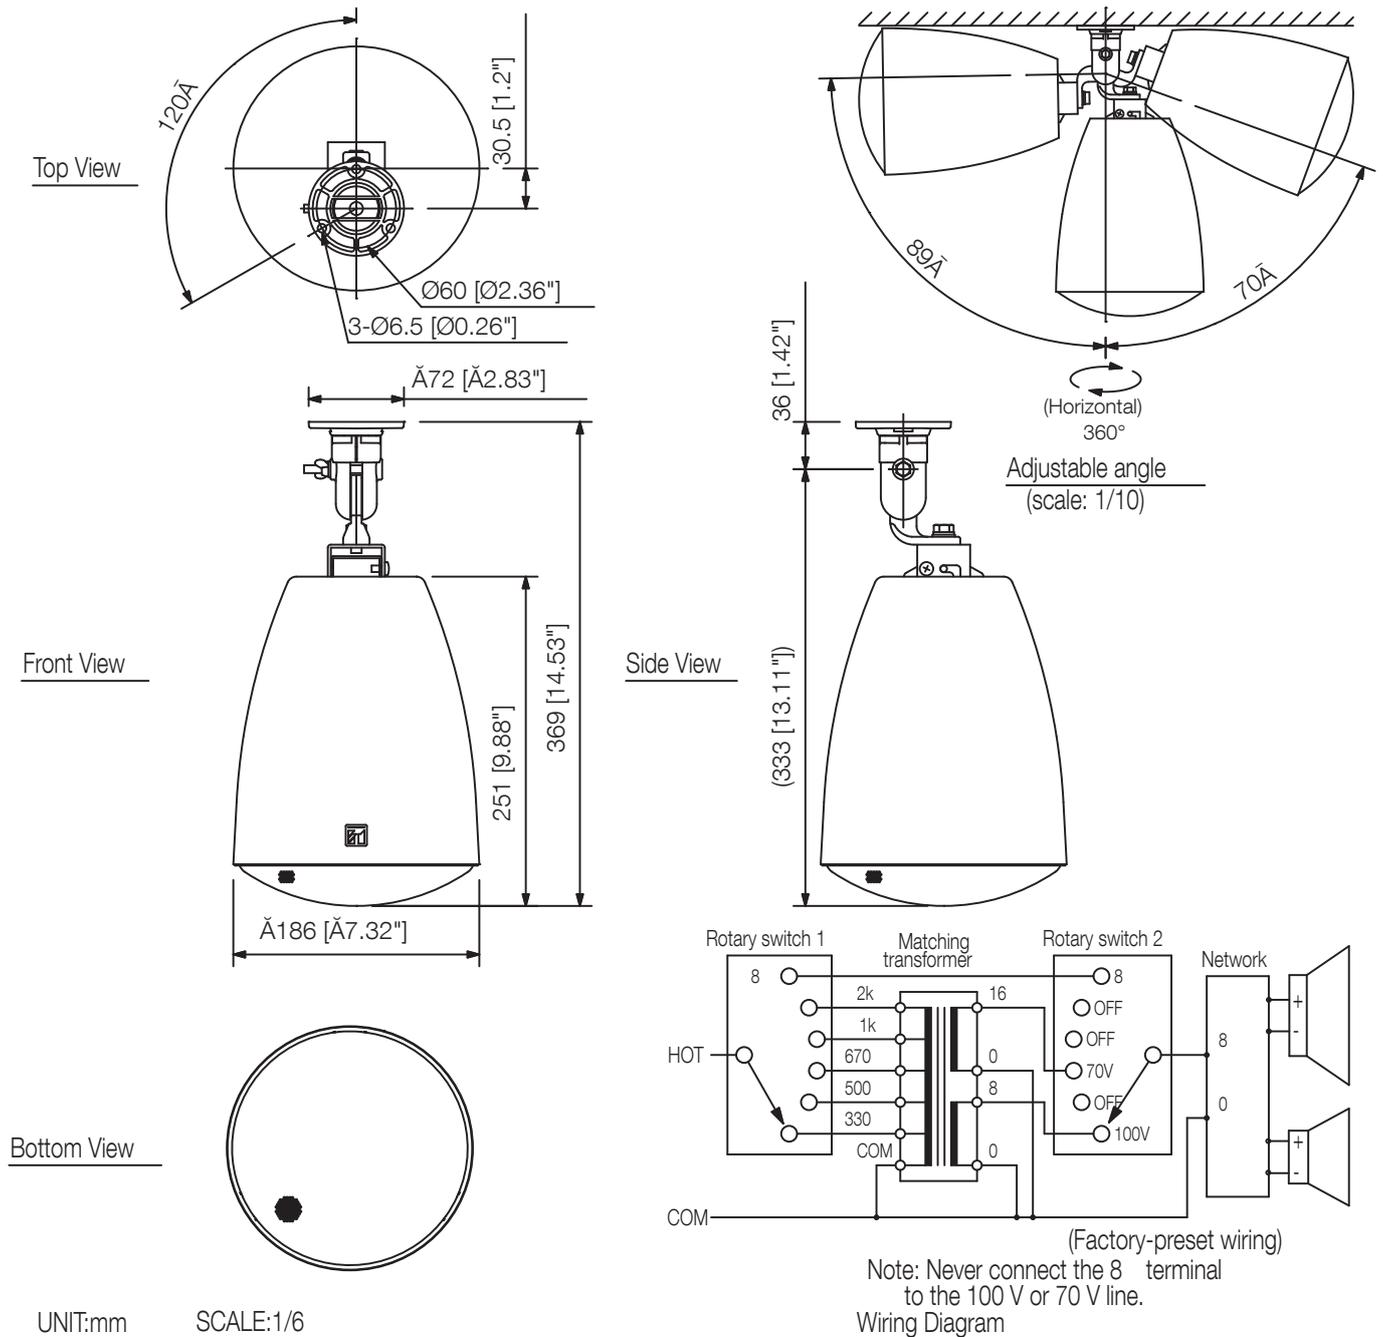

UNIT:mm

SCALE:1/6