

TS-D1000-CU

The digital conference system's dedicated TS-D-1000-MU chairman unit can be instantly used by simply connecting it to the TS-D1000-MU master control unit using easily-obtainable CAT5e STP LAN cables. It can also be optionally equipped with either the TS-D1000-M1 standard microphone or the TS-D1000-M2 long microphone.



Article number:TS-D1000-CU Y


Specifications

Power source.	24 V DC supplied from the TS-D1000-MU Master control units, TS-D1000-SU Sub control units or TS-D1000-EX Extension units
Power source.	24 V DC supplied from the TS-D1000-MU Master control units, TS-D1000-SU Sub control units or TS-D1000-EX Extension units
Inputs	Microphone Terminal: XLR-3-31 type
Outputs	Monitor Speaker: 8Ω, 0.4W Earphone: Ø3.5 mm mini jack (monaural) *2
Finish.	ABS resin, paint, black,
Operating humidity.	90%RH or less (no condensation)
Operating temperature.	0 °C to 40 °C (32 °F to 104 °F)

TS-D1000-CU

Appearance

■ APPEARANCE

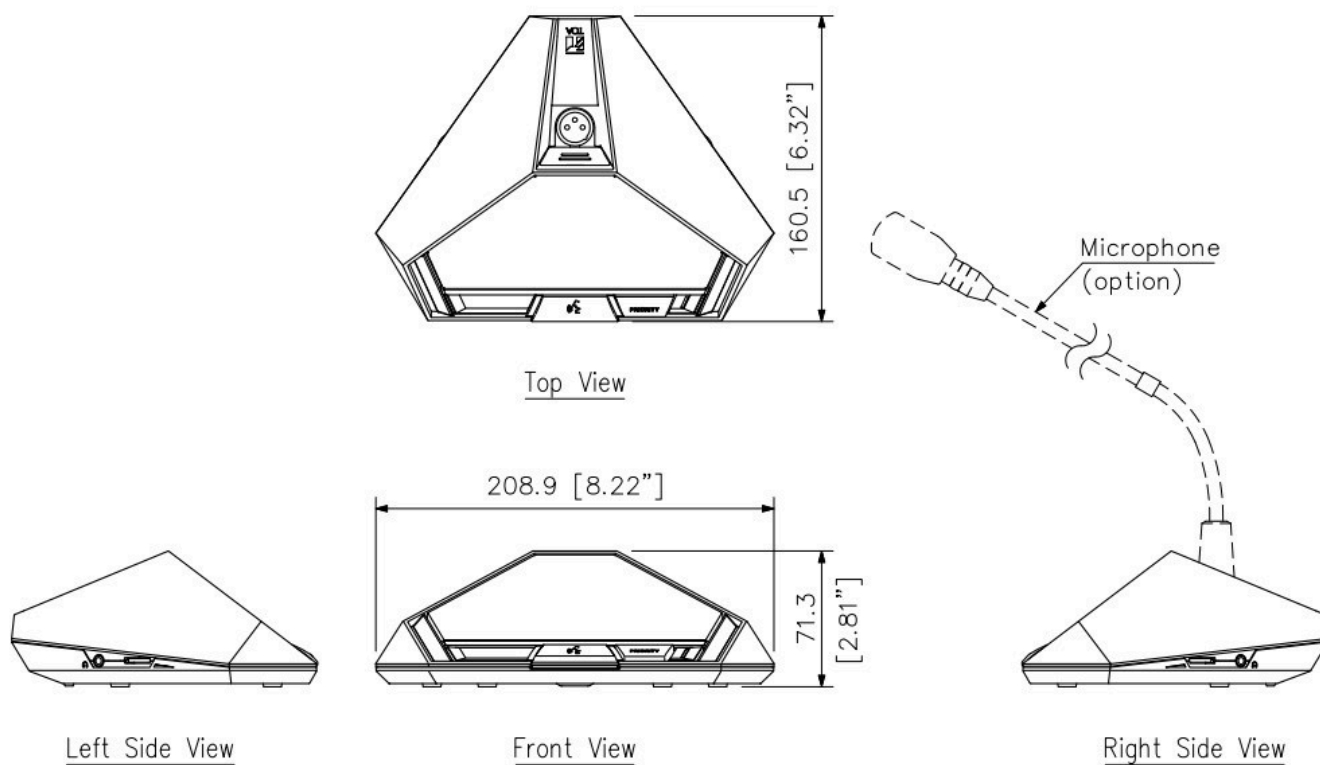

UNIT:mm SCALE:1/4