

WG-D100T

A easy-to-use Sender with lapel microphone for the digital tour guide system. The service coverage of up to 150m (outdoor) lets you guide the tour with high quality voice transmission without losing the connection to your attendees




Article number:WG-D100T

Specifications

Power source	Battery (1 x Ni-MH type "AA" 1.2V or AA alkaline)
Audio input	External microphone input (ø 3.5 monaural mini jack)
Battery life	8 h
Frequency range	863 - 865 MHz
RF output power	10 mW
Dimensions (W x H x D)	40 x 83,5 x 24,6 mm
Dimensions (ø x D)	x 24,6 mm
Finish	ABS resin, black,
Operating temperature	-10 ~ 50°C

Appearance

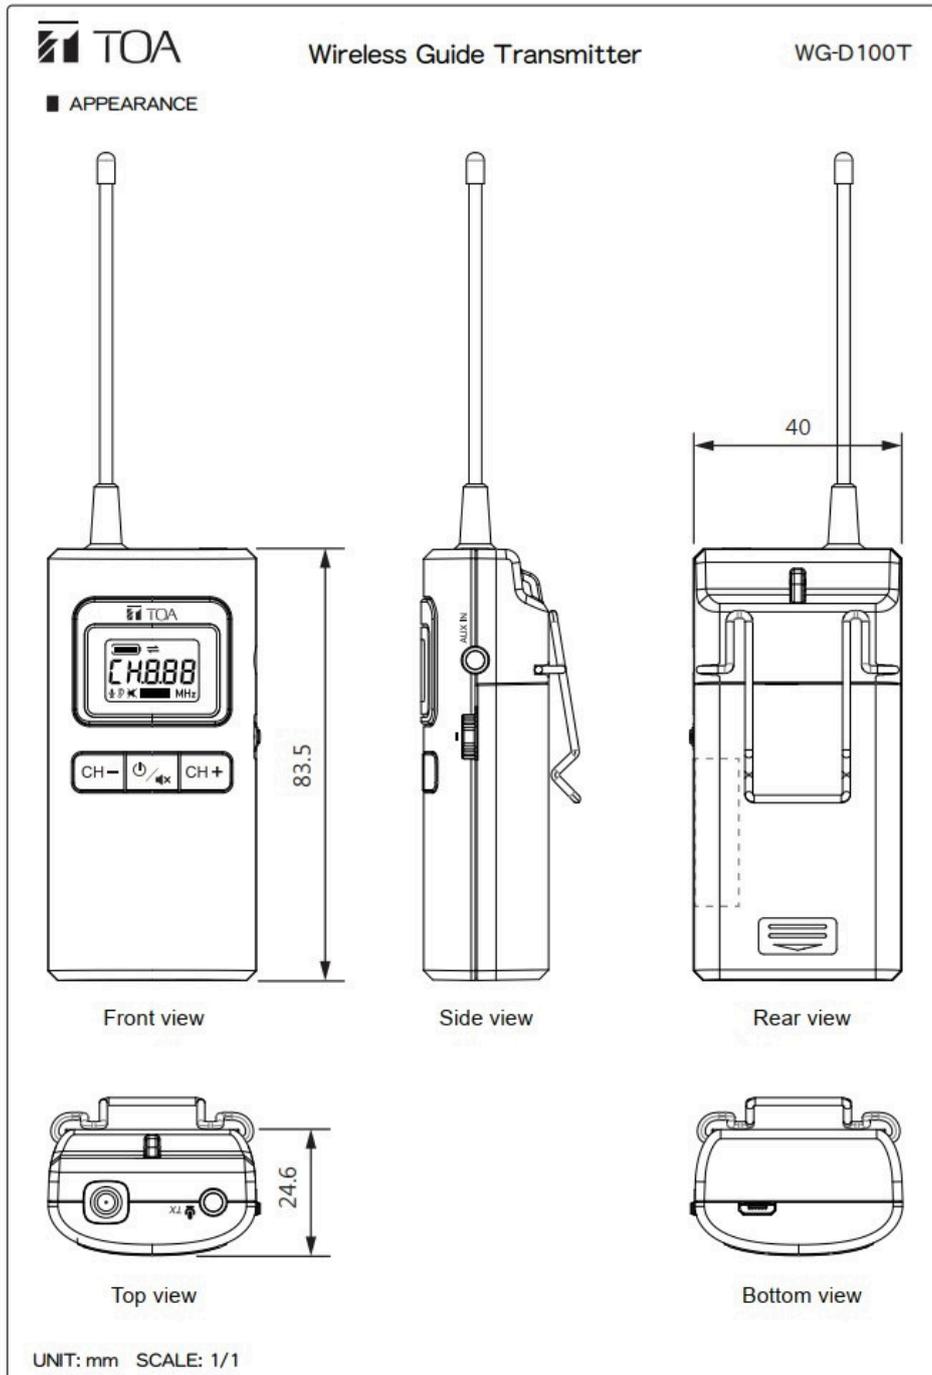

TOA Corporation