

LinkSide

UNT NMA SHFJ (SM/OM/OM2/OM3/OM4/OM5) FO


Product code: 490138, 490139, 490140, 490141, 490142, 490143, 490144, 490145, 490146

The fibers are positioned in a loose tube made of a high modulus plastic. The tubes are filled with a water-resistant filling compound. The tube is wrapped with a layer of water-blocking material is applied to keep the cable from waterkevlar . Then the cable is completed with FR-LSZH sheath.

Construction :

Application:

Adopted to indoor or outdoor distribution;
Small cable size, light weight;
With excellent waterproofing performance.
E-glass yarn high tension

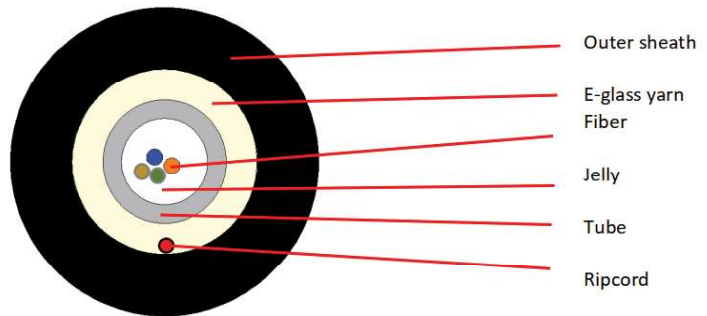

Standard Color Identificati						
No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	grey	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

Technical specifications

Cable Mechanical characteristic		
Items	Cable diameter	Weight
2 cores	6.0±0.5	45.00kg/km
4 cores	6.0±0.5	45.00kg/km
6 cores	6.0±0.5	45.00kg/km
8 cores	6.0±0.5	45.00kg/km
10 cores	6.0±0.5	45.00kg/km
12 cores	6.0±0.5	45.00kg/km
Tube OD	2.8mm	
Strength member	E-glass yarn	
Outer sheath	LSZH	
Storage temperature (°C)	-20+60/-20+80	
Min Bending Radius(mm)	Long term	10D
Min Bending Radius(mm)	Short term	20D
Min allowable Tensile Strength(N)	Long term	400
Min allowable Tensile Strength(N)	Short term	1000
Crush Load (N/100mm)	Long term	200
Crush Load (N/100mm)	short term	1000

LinkSide

Fiber characteristic						
Fiber style	Unit	SM G652	SM G652D	MM 50/125	MM 62.5/125	MM OM3-300
condition	nm	1310/1550	1310/1550	850/1310	850/1300	850/1300
attenuation	dB/km	≤ 0.36/0.23	≤ 0.34/0.22	≤ 3.0/1.0	≤ 3.0/1.0	≤ 3.0/1.0
Dispersion	1550nm	Ps/(nm*km) ---	≤ 18	---	---	Dispersion
	1625nm	Ps/(nm*km) ---	≤ 22	---	---	
Bandwidth	850nm	MHZ.KM ---	---	≥ 400	≥ 160	Bandwidth
	1300nm	MHZ.KM ---	---	≥ 800	≥ 500	
Zero dispersion wavelength	nm	1300-1324	≥ 1302, ≤ 1322	---	---	≥ 1295, ≤ 1320
Zero dispersion slope	nm	≤ 0.092	≤ 0.091	---	---	---
PMD Maximum Individual Fibr		≤ 0.2	≤ 0.2	---	---	≤ 0.11
PMD Design Link Value	Ps(nm ² *km)	≤ 0.12	≤ 0.08	---	---	---
Fibre cutoff wavelength λ _c	nm	≥ 1180, ≤ 1330	≥ 1180, ≤ 1330	---	---	---
Cable sutoff	nm	≤ 1260	≤ 1260	---	---	---
MFD	1310nm	um 9.2+/-0.4	9.2+/-0.4	---	---	---
	1550nm	um 10.4+/-0.8	10.4+/-0.8	---	---	---
Numerical Aperture(NA)		---	---	0.200+/-0.015	0.275+/-0.015	0.200+/-0.015
Step(mean of bidirectional measurement)	dB	≤ 0.05	≤ 0.05	≤ 0.10	≤ 0.10	≤ 0.10
Irregularities over fiber length and point	dB	≤ 0.05	≤ 0.05	≤ 0.10	≤ 0.10	≤ 0.10
Dicontinuity						
Difference backscatter coefficient	dB/km	≤ 0.05	≤ 0.03	≤ 0.08	≤ 0.10	≤ 0.08
Attenuation uniformity	dB/km	≤ 0.01	≤ 0.01	---	---	---
Core diameter	um	---	---	50+/-1.0	62.5+/-2.5	50+/-1.0
Cladding diameter	um	125.0+/-0.1	125.0+/-0.1	125.0+/-0.1	125.0+/-0.1	125.0+/-0.1
Cladding non-circularity	%	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Coating diameter	um	242+/-7	242+/-7	242+/-7	242+/-7	242+/-7
Coating/chaffinch concentricity error	um	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0
Coating non circularity	%	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0
Core/cladding concentricity error	um	≤ 0.6	≤ 0.6	≤ 1.5	≤ 1.5	≤ 1.5
Curl(radius)	um	≤ 4	≤ 4	---	---	---

Package						
1.Packing material: Wooden drum						
2.Packing length: standard length of cable shall be 2 km. Other cable length is also available if required by customer						
Cable marking and cable reel marking						
The cable sheath shall be marked with white characters according to customer's requirement.						