

The TC-615 is a highly intelligible, general-purpose speaker suited to public address announcement applications. Its external speaker component finished with powder coating, and stainless steel screws ensure the unit's weatherproof capability.





Article number:TC-615 EU
Alternative products: TC-615M, TC-631,
TC-631M


Specifications

Sensitivity (1#V, 1#m)	108 dB
Frequency response	250 Hz - 7 kHz
Rated input (high impedance)	15 W
Rated impedance	8 Ω
Finish	Aluminium, powder coating, traffic white (RAL 9016 or equivalent),
Operating temperature	-20°C to +55°C



Appearance

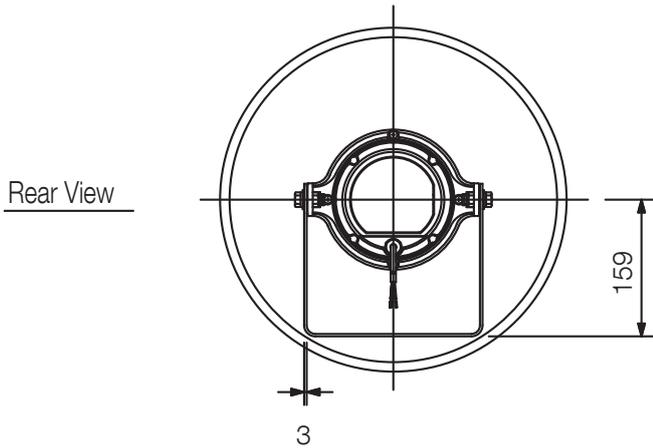

Wiring diagram

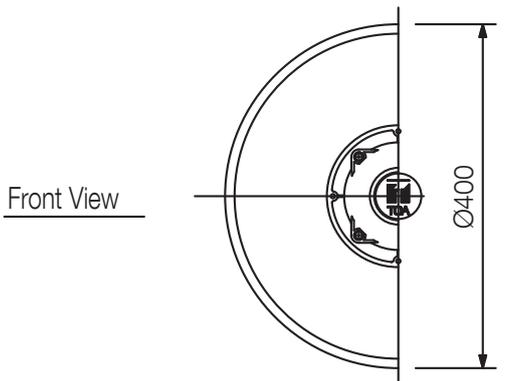

Side View

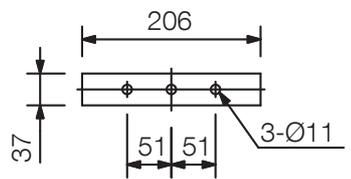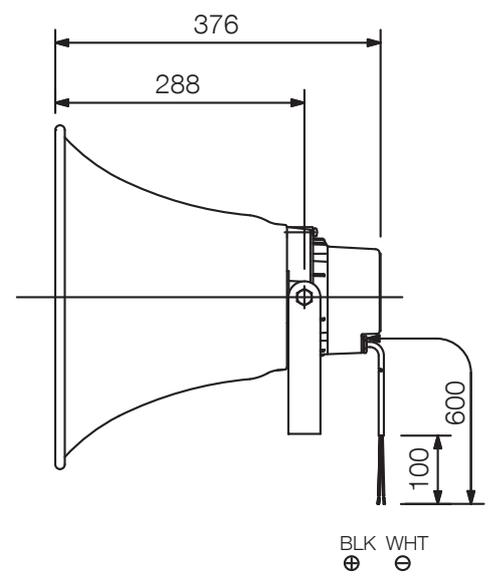

Bracket dimensional diagram

UNIT:mm SCALE:1/10