

The TU-631M is a highly intelligible driver unit suited to public address announcement applications. Use the driver unit in combination with a suitable horn (optional). Its powder-coated finish and stainless steel screws ensure the unit's weatherproof capability.




Article number: TU-631M


Specifications

Sensitivity (1#V, 1#m)	110 dB (with TH-650, TH-660)
Frequency response	150 Hz - 6 kHz
Rated input (high impedance)	30 W
Tappings	100 V line: 330 Ω (30 W), 670 Ω (15 W), 1 kΩ (10 W), 2 kΩ (5 W) 70 V line: 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W), 1 kΩ (5 W), 2 kΩ (2.5 W)
Finish	Aluminium, powder coating, grey, Rear cover: ABS resin, grey
Operating temperature	-20°C to +60°C (-4°F to 140°F)

Appearance

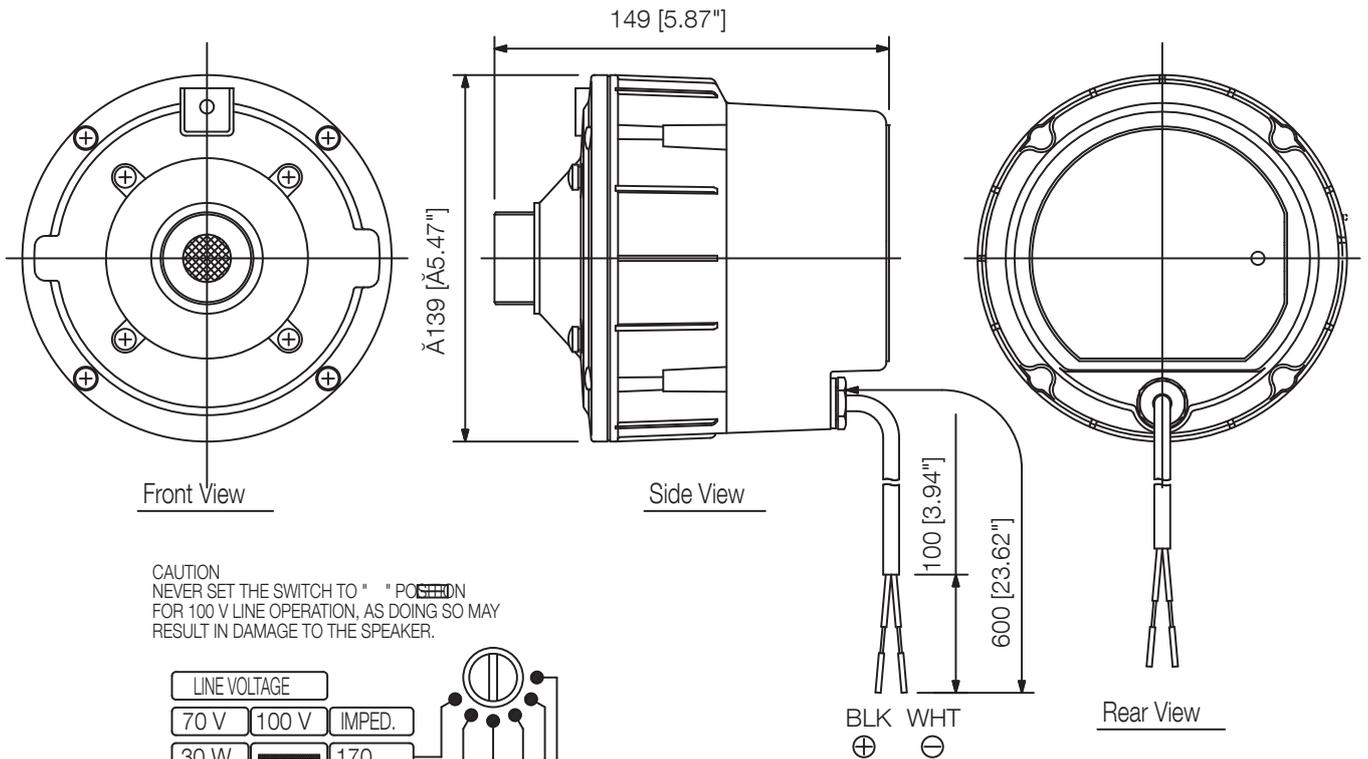


CAUTION
NEVER SET THE SWITCH TO " " POSITION
FOR 100 V LINE OPERATION, AS DOING SO MAY
RESULT IN DAMAGE TO THE SPEAKER.

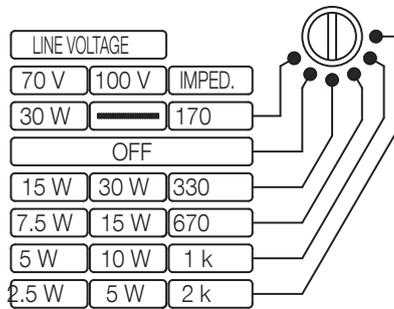

Set the impedance selector to the desired impedance.

Impedance Selection

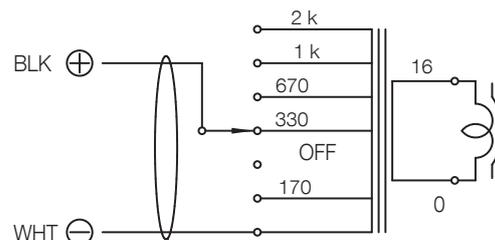

(Transformer connection when the speaker is supplied from the factory)

Wiring diagram

UNIT:mm

SCALE:1/3