

PC-3CL

CEILING SPEAKER

The PC-3CL is a completely-sealed, flush-mounted ceiling speaker made up of a high power handling, splash-proof, small full-range speaker employing a plastic film diaphragm. Its chemical-resistant grille makes the speaker ideal for use in clean rooms, hospital operation rooms, and hot and humid locations such as bath rooms and wet sauna rooms.



Article number:PC-3CL
Alternative products: PC-5CL


Specifications

Sensitivity (1#V, 1#m)	87 dB
Frequency response	150 Hz - 20 kHz
Rated input (high impedance)	3 W
Tappings	3 / 1 W (100 V), 1.5 / 0.5 W (70 V)
Finish	ABS resin, front grille: stainless steel, ring: alloy coated ABS chrome plating, all silver look
Operating temperature	-20 °C to +60 °C

PC-3CL

CEILING SPEAKER

Appearance

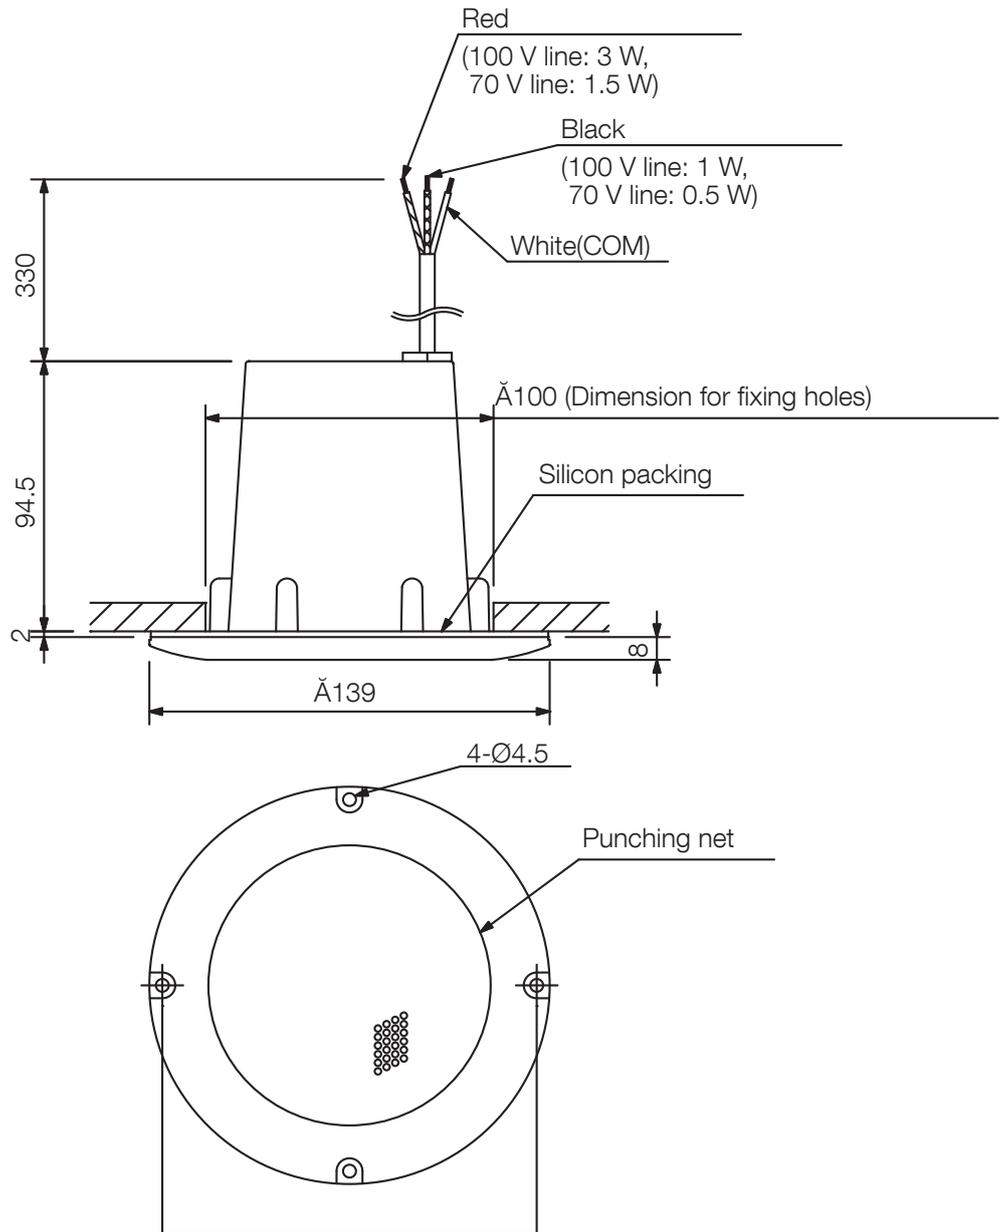

UNIT:mm

SCALE:1/3