

The WM-5225 Wireless Microphone employs an electret condenser microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.




Article number: WM-5225 G01
 Alternative products: WM-5265 G01,
 WM-5270 G01

Specifications

Power source.	Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2
Battery life	10 h
Directivity	Cardioid
Microphone type.	Electret condenser
Directivity	Cardioid
Power source.	Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2
Frequency range	606 – 636 MHz
Selectable frequencies	64
Simultaneous channels	16
AF response	100 Hz - 15 kHz
RF output power	10 mW
Max. input level (value)	126 dB SPL
Max. input level	126 dB SPL
Finish.	Resin, black,
Operating humidity.	30% - 85%
Operating temperature.	-10°C ... +50°C

Appearance

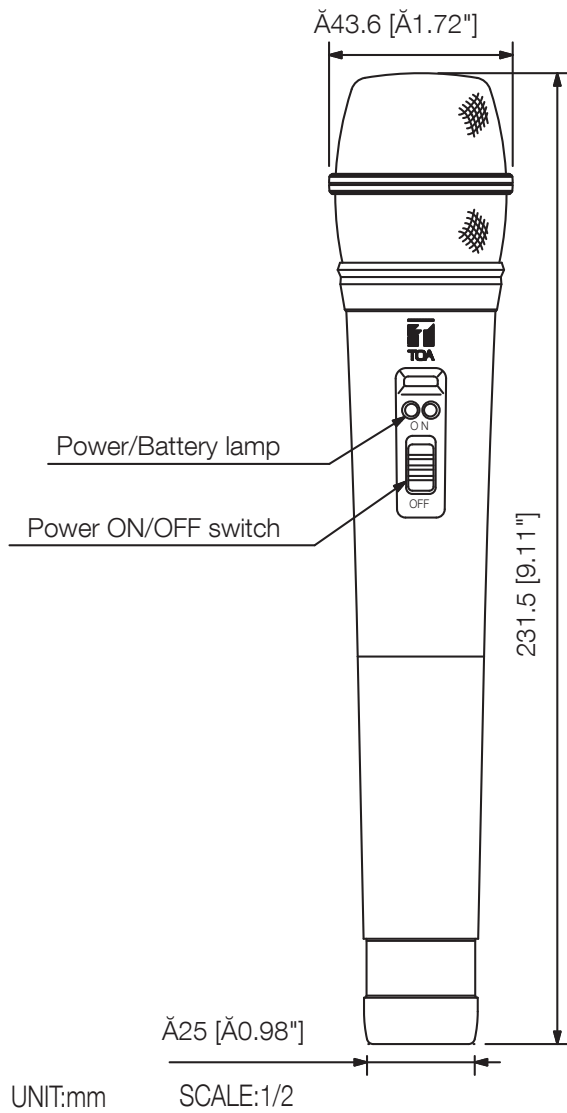

*

Type	Frequency Range
A01	692 - 722 MHz, UHF
B01, B02	722 - 752 MHz, UHF
C01 - C07	794 - 830 MHz, UHF
D01 - D05	830 - 865 MHz, UHF
E01	668 - 698 MHz, UHF
F01	636 - 666 MHz, UHF
G01, G02	606 - 636 MHz, UHF
H01	576 - 606 MHz, UHF
K01	925 - 937.5 MHz, UHF

